

## SPECIFICATION NOTES:

### ELECTRICAL:



- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE



### MECHANICAL:





- HOUSING/INSERT MATERIAL:  
THERMOPLASTIC, PBT UL94V-0, COLOR BLACK
- CONTACT MATERIAL: PHOSPHOR BRONZE  $\phi 0.46$
- PLATING: GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTACT AREA FU/3U/6U/15U/30U"
- OPERATING LIFE: 750 CYCLES MIN.

### ENVIRONMENTAL:

- STORAGE: -40° C TO +85° C
- OPERATION: 0° C TO 75° C

LED L YELLOW    LED R GREEN  
 9  10    11  12

LED L YELLOW    LED R GREEN  
 13  14    15  16

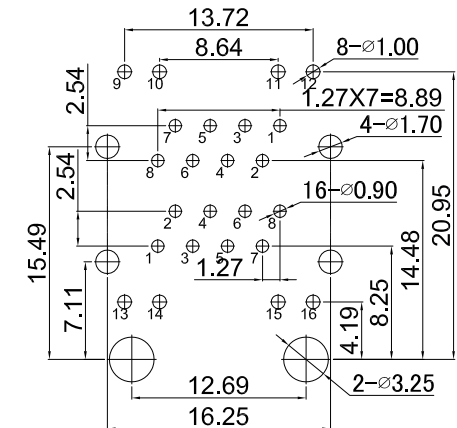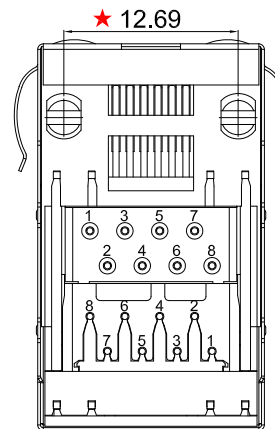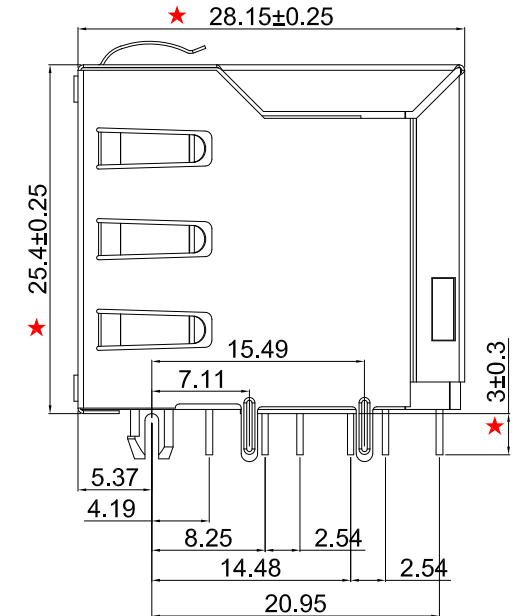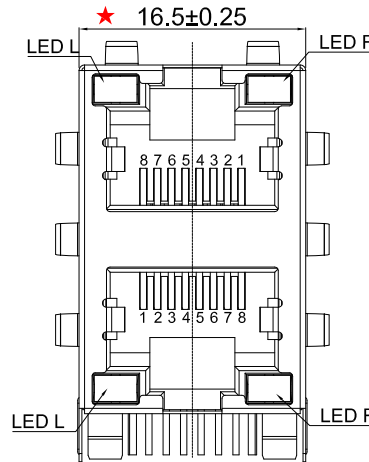

PC Board Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm    SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PJECTION 

照片框

### ORDER INFORMATION

MJF25ULB1-KF06B7YG-0808-LF

SERIES

LEADFREE

BLACK

6u" GOLD

FULL SPRING

8P8C

REAR TAB 7.11mm

LED L/YELLOW LED R/GREEN

DESCRIPTION: Shielded RJ45 Modular Jack, Through Hole Type, with LED, 2x1 Ports