


- MATERIALS:
- BOTTOM HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
 - TOP HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER, BLACK COLOR.
 - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
 - SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS

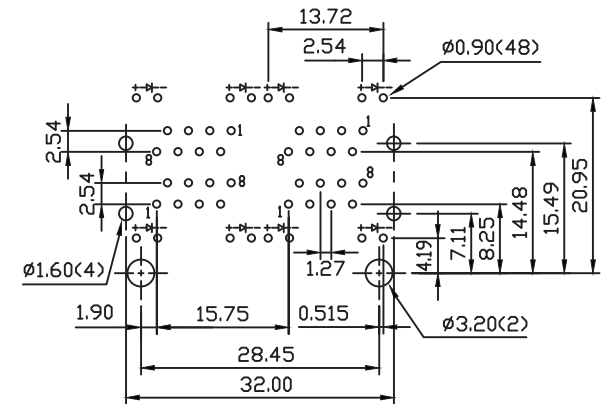

PCB LAYOUT
Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MJF25ULB2-KX06B7xx-0808-LF

SERIES

LEADFREE

8P8C

YG:YELLOW/GREEN

GY:GREEN/YELLOW

REAR TAB 7.11mm

06u" GOLD

BLACK

NON SPRING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2X2 STACKABLE MODULAR JACK RJ45, WITH LED'S AND SHIELD