


**DETAIL X**

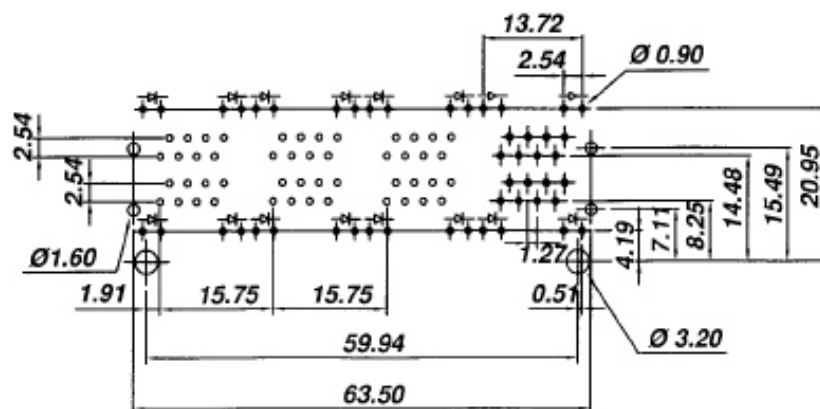

**PC Layout  
(Top View)**

**SPECIFICATION :**

**1. Electrical Char.**

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

**2. Physical char.**

- Housing : PBT Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor Bronze  
Gold Plating Over Nickel
- Temperature Range : - 25 /+90 Deg C
- Durability : 500 Mating cycles Min.

**3. LED filings.**

- Forward DC Current : 2 mA
- Forward Voltage : 1.8 Volts Typical
- Reverse Voltage : 5 Volts Min.

**RoHS Compliant**


TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE  
SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



**ORDER INFORMATION**

**MJF25ULB4-KX06B7GR-0808**

SERIES  
06u" GOLD  
NON EAR  
BLACK  
8P8C  
LED1 / LED2  
GR:GREEN / RED  
REAR TAB 7.11mm

DESCRIPTION:

[www.morethanall.com](http://www.morethanall.com)