


DETAIL X

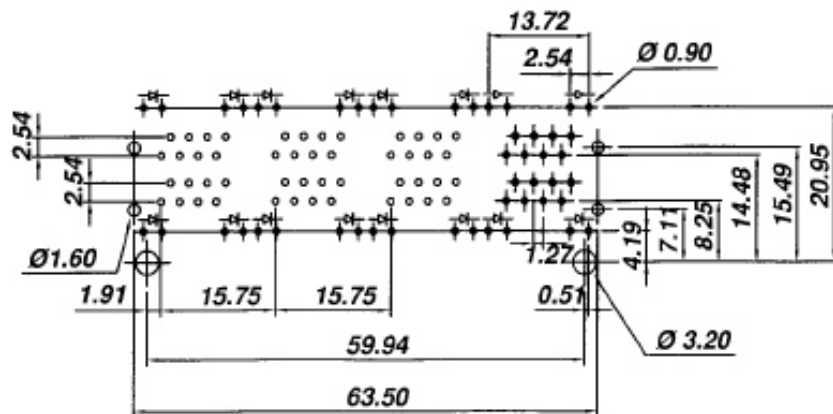

PC Layout
(Top View)

SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing : PBT Glass Filled (UL 94V-0)
- Color : Black Color
- Spring Wire : 0.35mm Thickness Phosphor Bronze
Gold Plating Over Nickel
- Temperature Range : - 25 /+90 Deg C
- Durability : 500 Mating cycles Min.

3. LED filings.

- Forward DC Current : 2 mA
- Forward Voltage : 1.8 Volts Typical
- Reverse Voltage : 5 Volts Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

SIZE A4 PPROJECTION

照片框

ORDER INFORMATION

MJF25ULB4-KX06B7GY-0808

SERIES | | | 8P8C
LED1 / LED2
GREEN / YELLOW
REAR TAB 7.11mm
BLACK | 06u" GOLD
NON SPRING

DESCRIPTION: 2X4(2PORTS) 8POSITION LED SIDE ENTRY SHIELDED PCB JACK

www.morethanall.com