


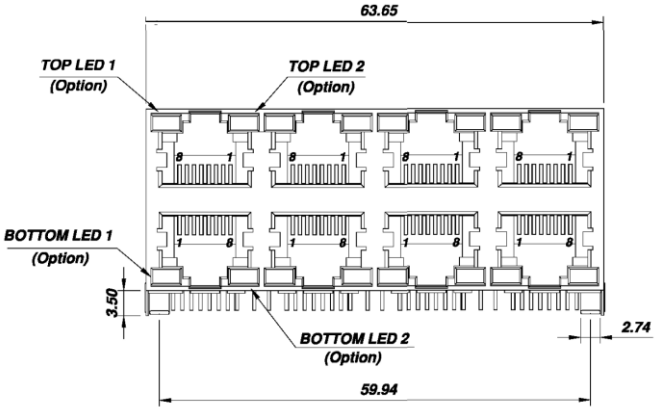


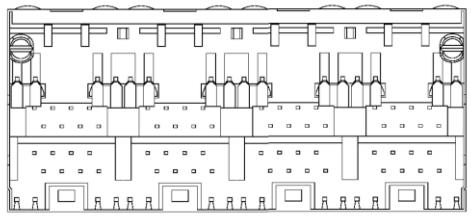

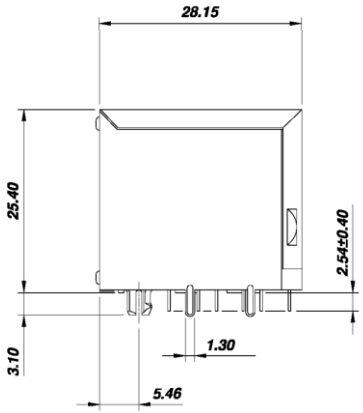

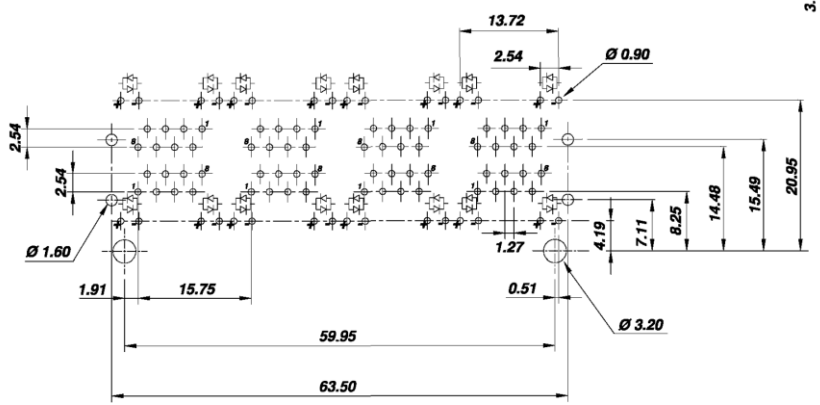

PC Layout
(Top View)

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
Contact Resistance : 30milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 150V AC.
Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

Housing (Option) : For Waving Soldering Process
PBT Glass Filled (UL 94V-0),Soldering Temperature:245°C for 5 Sec.
Color : Black Color
Spring Wire :
0.35mm Thickness Phosphor bronze Gold Plating Over Nickel
Shielded : Brass Plating Nickel
Temperature Range : - 40°C / +85°C
Durability : 750 Mating cycles Min.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.25
DATE	.XX ± 0.13
SIZE A4	PPOJECTION	.XXX ± 0.05
	ANG ±

照片框

ORDER INFORMATION

MJF25ULB4-KX30B7GY-0808
SERIES
8P8C
LED1 / LED2
GY:GREEN / YELLOW
30u" GOLD
NON EAR
BLACK
REAR TAB 7.11mm

DESCRIPTION: