
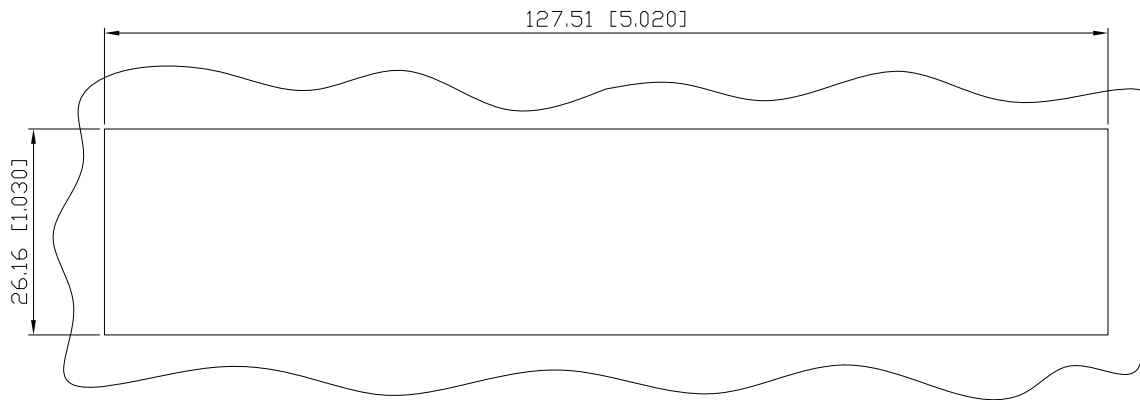
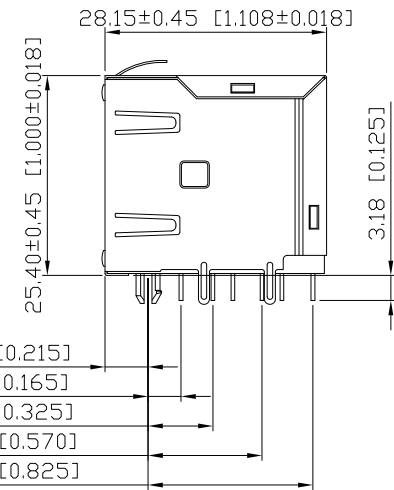


1. MECHANICAL DIMENSIONS :

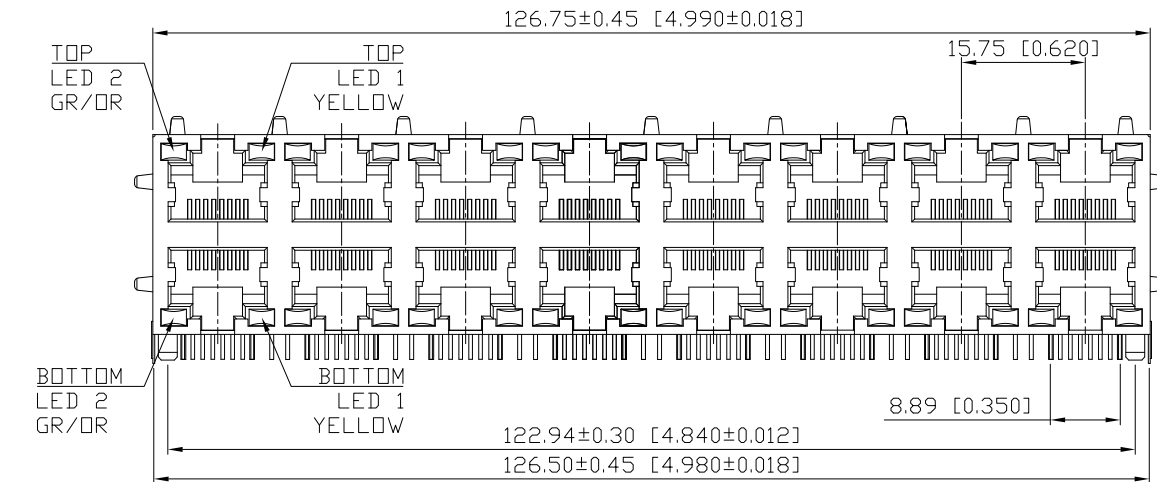

RECOMMENDED  
PANEL CUTOUT DIMENSION

- NOTES:
1. MATERIAL:  
HOUSING: NYLON GLASS FILLED POLYESTER UL94V-0, BLACK  
CONTACTS: 0.35mm THICK PHOS-BRONZE,  
15u" GOLD PLATING OVER NICKEL  
SHIELD: COPPER ALLOY, PLATED WITH NICKEL
  2. OPERATING TEMPERATURE: -40°C~+85°C
  3. INSERTION FORCE: 4 POUNDS MAX.  
EXTRACTION FORCE: 4 POUNDS MAX.
  4. DURABILITY: 750 MATING CYCLED MIN.
  5. CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68,  
SUBPART F.
  6. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

.XXX ±

ANG ±

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MJF25ULB8-KF06B7GOYX-0808

SERIES

8P8C

BLACK

LED1  
GREEN, ORANGE / YELLOW, X  
REAR TAB 7.11mm

LED2

06u" GOLD  
FULL SPRING


煜倫股份有限公司

www.morethanall.com

DESCRIPTION: STACKED RJ45 2X8 8P8C, W/LED, SHIELDED



3. PROFILE OF WAVE SOLDER : 

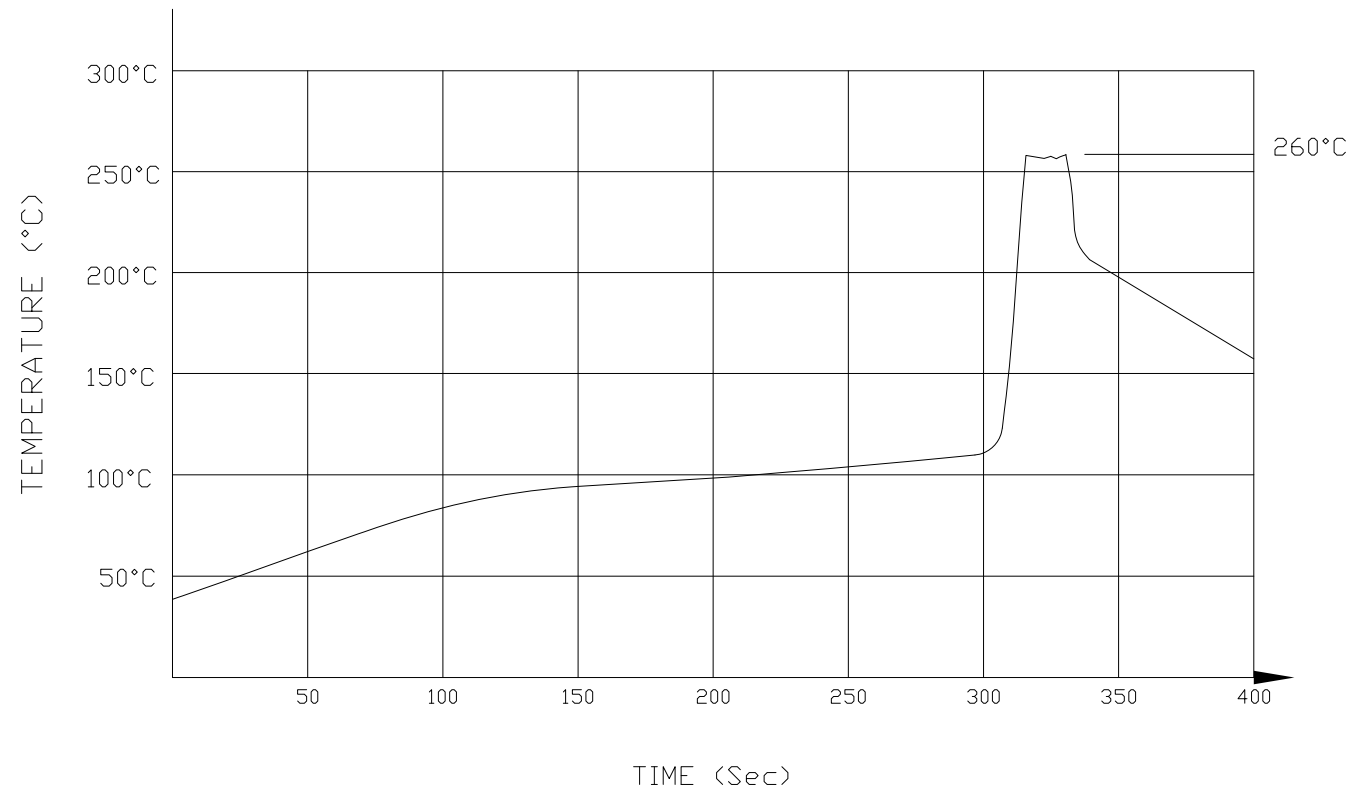

SUGGESTED WAVE SOLDER CURVE

- (1) TIP temperature :  $260 \pm 5^{\circ}\text{C}$
- (2) TIP temperature time : 10Sec. Max.

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

PJECTION 

照片框

ORDER INFORMATION

MJF25ULB8-KF06B7GOYX-0808

SERIES

8P8C

BLACK

LED1  
GREEN, ORANGE / YELLOW, X  
REAR TAB 7.11mm

LED2

06u" GOLD  
FULL SPRING

DESCRIPTION: STACKED RJ45 2X8 8P8C, W/LED, SHIELDED