

**SPECIFICATION :**





**1. Electrical Char.**

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

**2. Physical char.**

- Housing (Option) :
  - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
  - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
  - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

MJF27ULB4-KX06A4xx-0808  
 06:06u"/GOLD YG:YELLOW/GREEN  
 RoHS Compliant

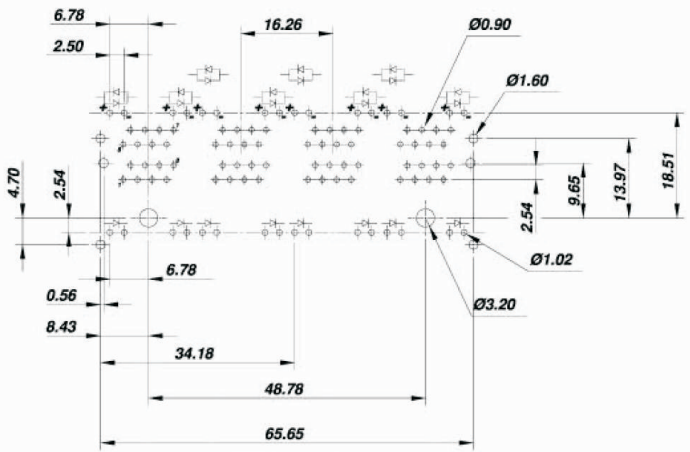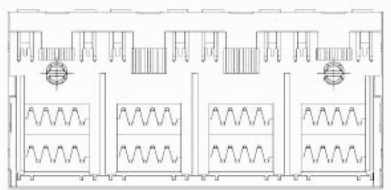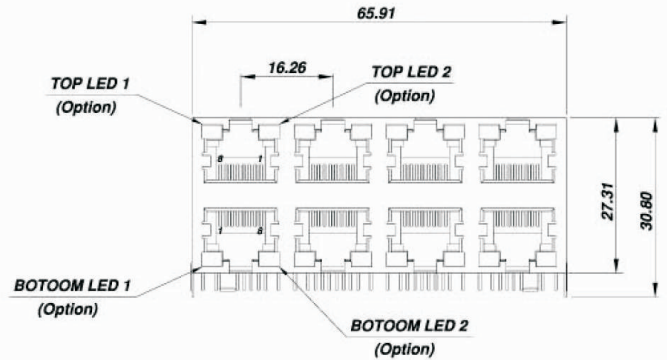

**PC Layout (Top View)**

LED Designation :					
Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	4	Yellow	Red
Y	Yellow	---	5	Green	Yellow
R	Red	---	6	Yellow	Green
O	Orange	---	9	Red	Green
3	Green	Red	0	Red	Yellow

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

**煜倫股份有限公司**

PART NO. MJF27ULB4-KX06A4xx-0808		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION:		
DWG NO. MJF27ULB4-KX06A4xx-0808		DRAWING BY		.X ± 0.2 .XX ± .XXX ± AWG				
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	