

SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :**
- PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
 - Color : Black Color
 - Spring Wire : 0.35mm Thickness Phosphor bronze Gold Plating Over Nickel.
 - Shielded : Brass Plating Nickel
 - Temperature Range : - 40°C / +85°C
 - Durability : 500 Mating cycles Min.

MJF27ULB4-KX50A4xx-0808





YG:YELLOW/GREEN

50:50u"/GOLD

RoHS Compliant

LED Designation :

Code	Forward	Reverse	Code	Forward	Reverse
G	Green	---	4	Yellow	Red
Y	Yellow	---	5	Green	Yellow
R	Red	---	6	Yellow	Green
O	Orange	---	9	Red	Green
3	Green	Red	0	Red	Yellow

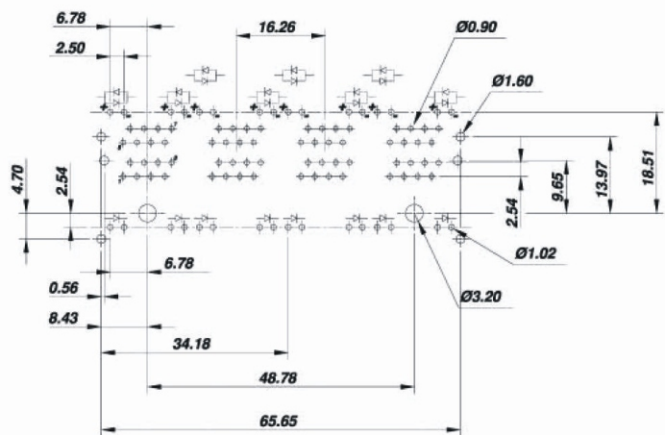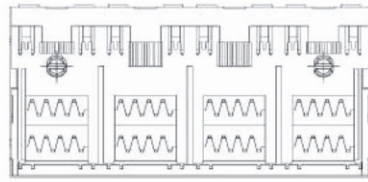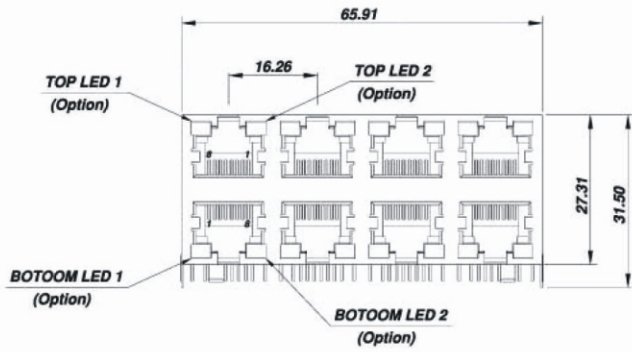

PC Layout (Top View)

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MJF27ULB4-KX50A4xx-0808		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION:				
DWG NO. MJF27ULB4-KX50A4xx-0808		DRAWING BY		.X ± 0.25 .XX ± 0.13 .XXX ± 0.05 AWG						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE			
UNIT / mm		SCALE 1:1								

煜倫股份有限公司