


SIDE VIEW FOR 2X2 ONLY

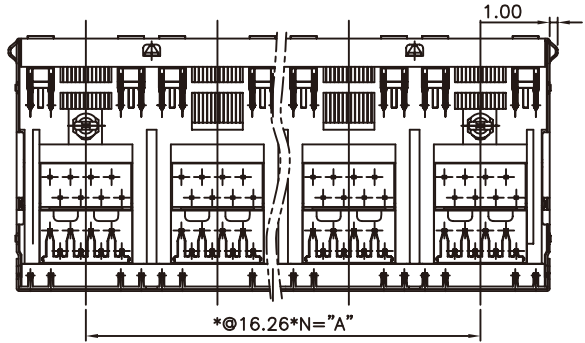

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.


MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm
3. PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS-PLATED TIN OVER NICKEL.
GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.
7. LED SIZE : 3.2*2.0*4.0*P=2.29mm


ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

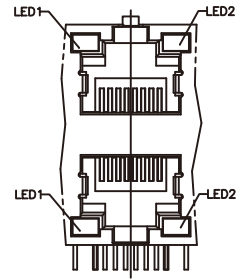

LED LAYOUT

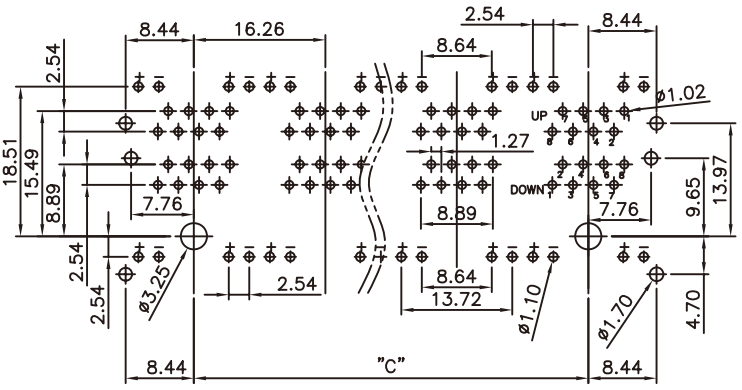

PC Board Layout example
Component Side Shown

| PORTS | N | A±0.25 | B±0.25 | C±0.05 |
|-------|---|--------|--------|--------|
| 2x8 | 7 | 113.82 | 130.95 | 113.82 |
| 2x6 | 5 | 81.30 | 98.43 | 81.30 |
| 2x4 | 3 | 48.78 | 65.91 | 48.78 |
| 2x3 | 2 | 32.52 | 49.45 | 32.52 |
| 2x2 | 1 | 16.26 | 33.39 | 16.26 |

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±



ORDER INFORMATION

MJF27ULBx-KF03A4xx-0808

SERIES 8P8C
 2:2X2 PORTS GR:LED1:GREEN/ LED2:RED
 8:2X8 PORTS RG:LED1:RED/ LED2:GREEN
 FRONT TAB 4.7mm
 BLACK 03u" GOLD FULL SPRING

DESCRIPTION: 2XN STACKED LED JACK

煜倫股份有限公司

www.morethanall.com