



Cat.5e 180 Degree Narrow Keystone Jack (UTP) / Dual Type(Krone & 110)



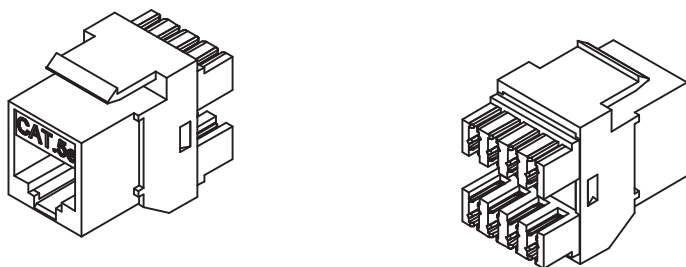


Dimensions : m/m



Color coding information

T568B:	T568A:
1—WH/OR	1—WH/GN
2—OR	2—GN
3—WH/GN	3—WH/OR
4—BL	4—BL
5—WH/BL	5—WH/BL
6—GN	6—OR
7—WH/BR	7—WH/BR
8—BR	8—BR



Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:

- Plastic Body : Fireproof ABS UL-94V0
- RJ-45 Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / 1.0mm UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned

Label Color Code: T568 A/B

IDC Description: For 22-26 AWG.
For 110 or Krone punch-down Tool

Electrical Specifications:

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps .
- DC Resistance : 0.1 ohm (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

- IDC Punch Down Cycle : Over 25 Cycles (min.)
- RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

MJK16C5E-CHP50-0808-LF

SERIES | | | | LEADFREE
| | | | 8P8C
| | | | 50u" GOLD
| | | | PLASTIC
| | | | GRAY
| | | | IDC

DESCRIPTION: