





# C5e KEYSTONE JACK UTP 50u

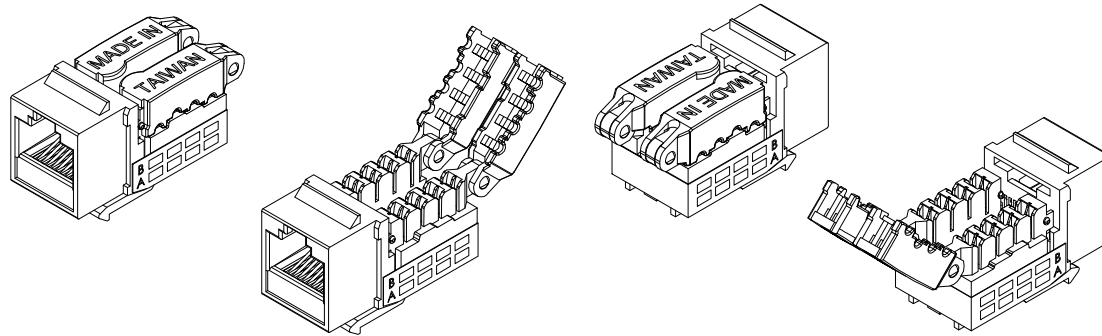

**Performance:**  
Meets C5e EIA/TIA 568B Standard.

**Materials:**  
 Body : Fireproof ABS UL-94V0  
 Jack : 8P8C 50 micro inches gold plated  
 PCB : FR-4 / UL-94V0  
 IDC Cap : Fireproof PC+Glass Fiber UL-94V2  
 IDC Body : Fireproof ABS UL-94V0  
 IDC Pin : Phosphor Bronze & Tinned  
**IDC Description :** For 22-26 AWG.  
 For 110 or Krone punch-down Tool  
 Toolless (when use IDC cap directly)

**Electrical Specifications:**  
 Insulation Resistance : 500M ohms (min.)  
 Contact Resistance : 20m ohms (max.)  
 Current Rating : 1.5 Amps .  
 DC Resistance : 0.1 ohms (max.)  
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

**Mechanical Specifications:**  
 IDC Punch Down Cycle : Over 250 Cycles (min.)  
 Jack Insertion Cycle : Over 2000 Cycles (min.)

**Operation Temperature :** -40 °C ~ +70 °C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.10

.X ± 0.20

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION



**ORDER INFORMATION**

MJK16C5E-TWP50TL-0808-LF

SERIES

IDT

PLASTIC

50u" GOLD

TOOLESS

8P8C

WHITE

LEADFREE

DESCRIPTION:

www.morethanall.com