


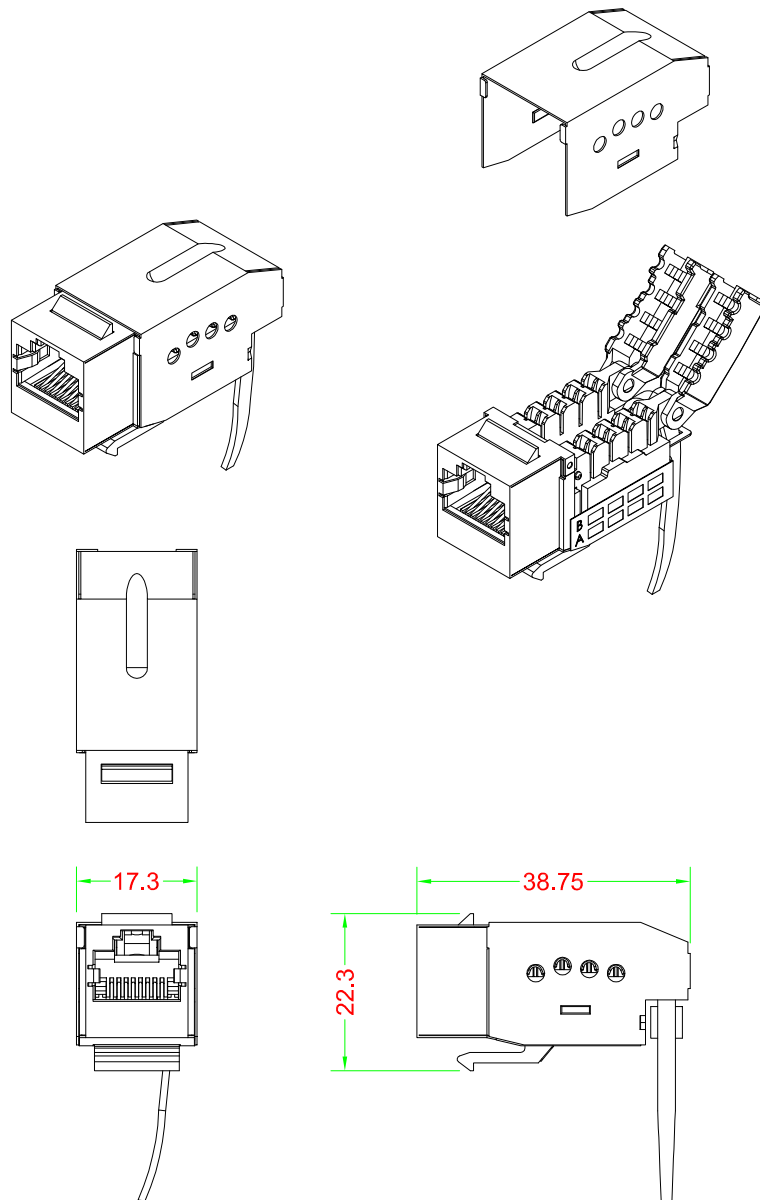

Performance:

Meets C6 EIA/TIA 568B Standard.

Materials:

Body : Fireproof ABS UL-94V0

Metallic Case : Metal

Jack : 8P8C 50 micro inches gold plated

PCB : FR-4 / UL-94V0

IDC Cap : Fireproof PC

IDC Body : Fireproof ABS UL-94V0

IDC Pin : Phosphor Bronze & Tinned

IDC Description : For 22-26 AWG.

For 110 or Krone punch-down Tool
Toolless (when use IDC cap directly)

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohms (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)

Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ± 1.00

CHECKED BY GENIUS

.X, ± 0.20

UNIT / mm

SCALE 1 : 1

.XX, ± 0.15

DATE

.XXX, ±

ANG, ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MJK16C6-TWF50TL-0808-LF

SERIES

IDT

50u" GOLD

TOOLESS

8P8C

LEADFREE

WHITE

FULL METAL

50u" GOLD

TOOLESS

8P8C

LEADFREE

DESCRIPTION: C6 KEYSTONE JACK FTP 50u

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com