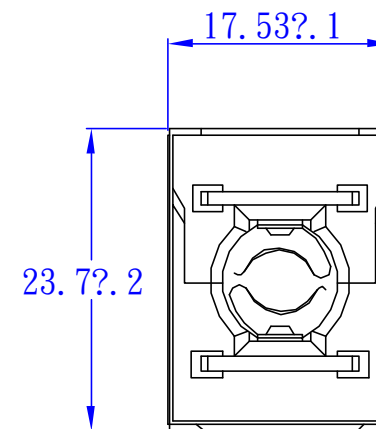
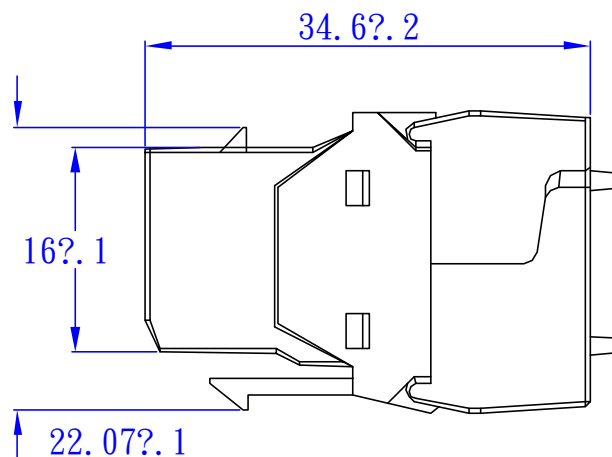



Features

- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature -40 °C +60 °C

Electrical

- Contact resistance 20M ohm
- DC Current rating 1.5Amps
- Insulation Resistance 500M ohm
- Dielectric withstanding voltage 100V

MATERIAL	
CATEGORY	☐ CAT. 5E ☐ CAT. 6 ☐ CAT. 3 ☒ OTHER <u>CAT. 6A</u>
HOUSING	DIE - CASTING
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	☐ 0.0762um/3u inch ☐ 0.15um/6u inch ☐ 0.38um/15u inch ☐ 0.76um/30u inch ☒ 1.27um/50u inch
COLOR	☐ WHITE ☐ BLACK ☐ GREEN ☐ BLUE ☐ YELLOW ☐ RED ☐ ORANGE ☐ IVORY ☐ OTHER _____
TYPE OF PRODUCT	☐ UNSHIELD ☒ SHIELD DIE - CASTING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJK16C6A-CWF50-0808-LF

SERIES

LEADFREE
8P8C
50u" GOLD
FULL METAL
WHITE
IDC

DESCRIPTION: