



MATERIAL: HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BORNZE
PLATED WITH HARD GOLD AND
TIN/LEAD IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH TIN/LEAD.
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

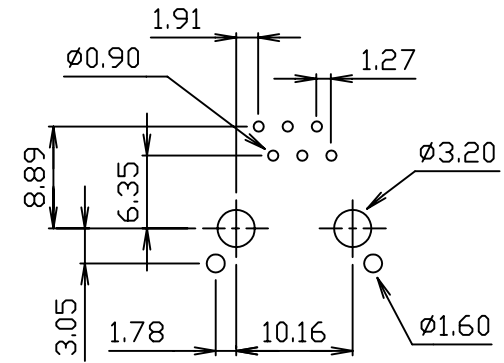

PC Board Layout

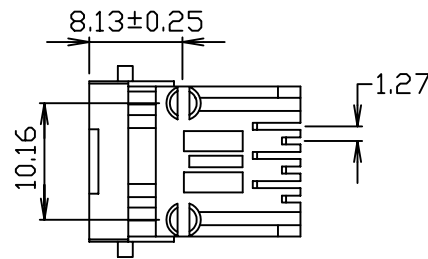

REVISIONS			
LTR	DESCRIPTION	DATE	APP
3.30		07/02/'01	
6.90		07/02/'01	
3.40		03/29/'02	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

焯倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PJECTION

照片框

ORDER INFORMATION

MJM13J-KES06A3-0606-LF

SERIES | | | | LEADFREE
BLACK | | | | FRONT TAB 3.05mm
EAR | | | | SPRING
| | | | 06u" GOLD
| | | | 6P6C

DESCRIPTION: 6 POSITION SHIELDED LOW PROFILE SIDE ENTRY PCB JACK PANEL GROUND TYPE