


MATERIAL: HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER,
 STANDARD COLOR-BLACK
 TERMINAL-0.35mm THICK PHOS-BORNZE
 PLATED WITH HARD GOLD AND
 TIN/LEAD IN SOLDER AREA.
 SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH TIN/LEAD.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

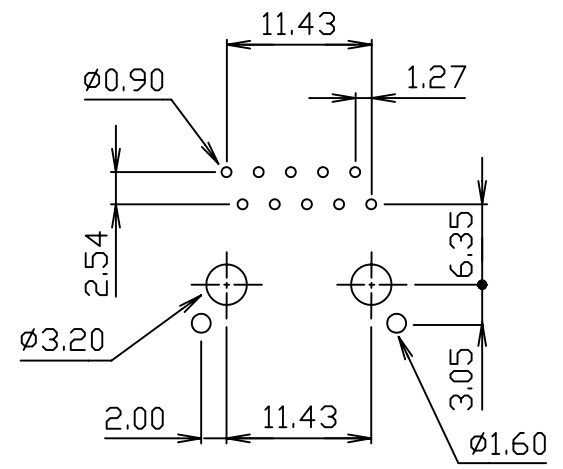

PC Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X.± .X± .XX± .XXX± ANG±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

MJM13J-KT06A3-1010-LF
 SERIES | | | LEADFREE
 | | | 10P10C
 | | | FRONT TAB 3.05mm
 | | | 06u" GOLD
 | | | TOP SPRING
 | | | BLACK

DESCRIPTION: 10POSITION SHIELDED LOW PROFILE, SIDE ENTRY PCB JACK
 PANEL GROUND TYPE