
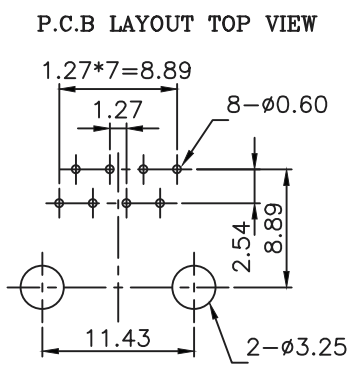

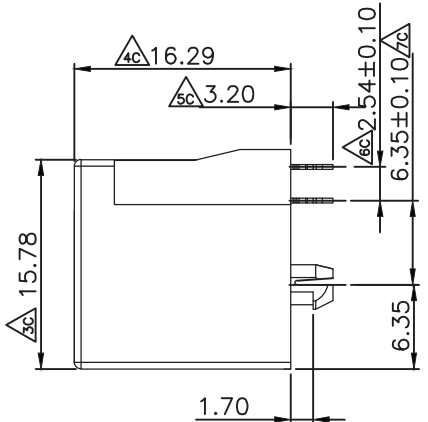


- Electrical:**
- 1.Voltage Rating:125 Vac Rms.
 - 2.Current Rating:1.5 Amp.
 - 3.Contact Resistance:40 Milliohms Max.
 - 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
 - 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

- Mechanical:**
- 1.Operating:750 Cycles Min.
- Environmental:**
- 1.Storage:-40°C To +85°C.
 - 2.Operation:-20°C To +75°C.
- Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
 TIN PLATING OVER NICKEL IN SOLDER AREA.

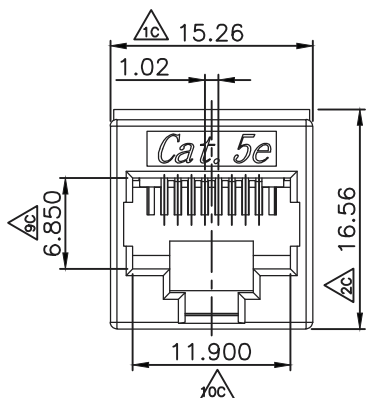

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MJP16C5E-KX06-0808-LF

SERIES | | | LEADFREE
 | | | 8P8C
 | | | 06u" GOLD
 | | | NON EAR
 | | | BLACK

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X ± 0.50
CHECKED BY GENIUS		.X ± 0.38
UNIT / mm	SCALE 1 : 1	.XX ± 0.25
DATE		.XXX ± 0.10
		ANG ± 3°
SIZE A4	PPOJECTION	

DESCRIPTION: Top Entry PCB Jack