
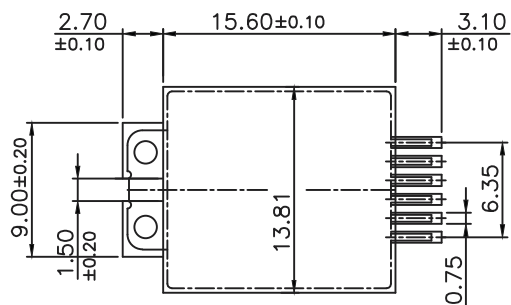

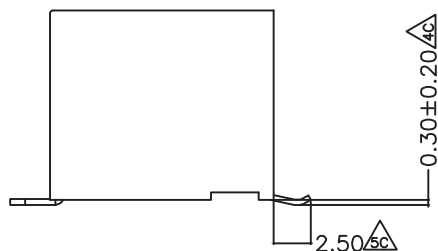




PCB LAYOUT/TOP VIEW

MATERIALS:

PLASTIC HOUSING: HIGH TEMP THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

TIN PLATING OVER NICKEL IN SOLDER AREA.

SOLDER PAD: BRASS WITH TIN PLATING OVER NICKEL.

Electrical:

1.Voltage Rating:125 Vac Rms.

2.Current Rating:1.5 Amp.

3.Contact Resistance:40 Milliohms Max.

4.Insulation Resistance:1000 Megohms Min @500 Vdc.

5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

1.Operating:750 Cycles Min.

Environmental:

1.Storage:-40°C To +85°C.

2.Operation:-20°C To +75°C.

3.IR Reflow Soldering Temperature:255°C To 265°C(5~10 Seconds).

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MJV12-KX06-0606-LF


SERIES

LEADFREE

6P6C
06u" GOLD
NON EAR
BLACK


DESCRIPTION:

(1.)

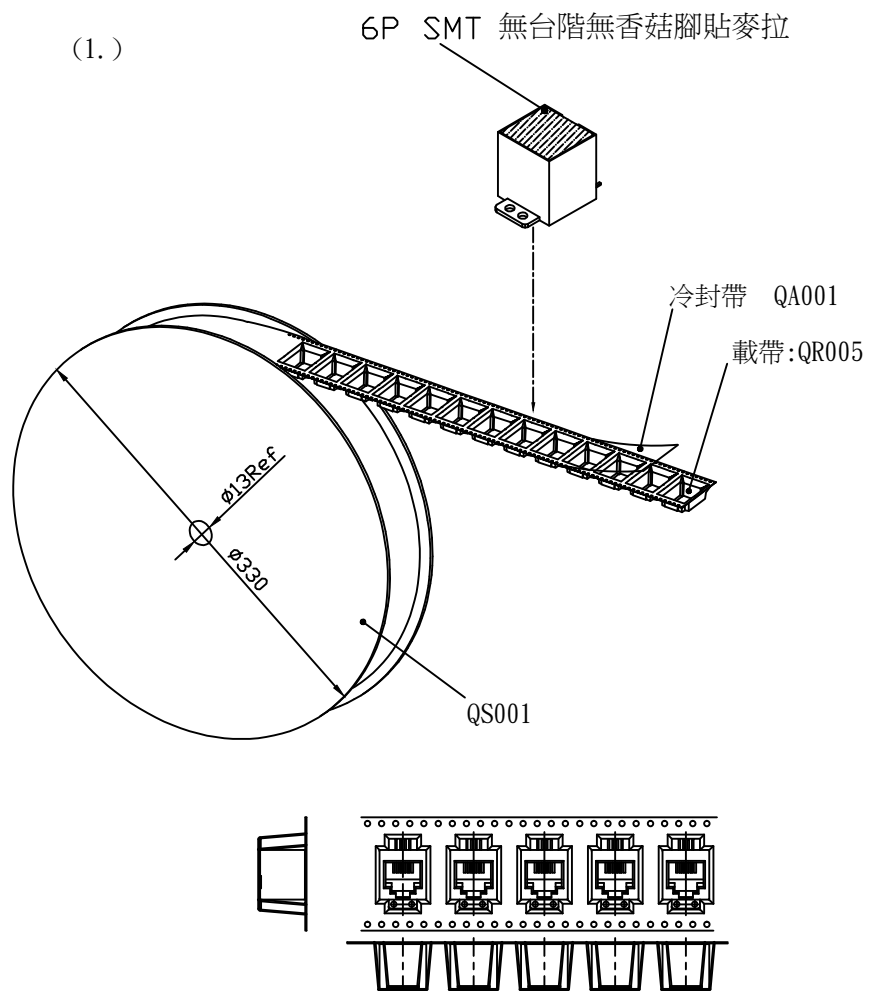

1. 請將組立完成之成品依圖面標示方向順序放入 QR005 內，前空10格，後空10格，封上 QA001，每盤裝180 PCS。(請注意捲帶方向)

(2.)

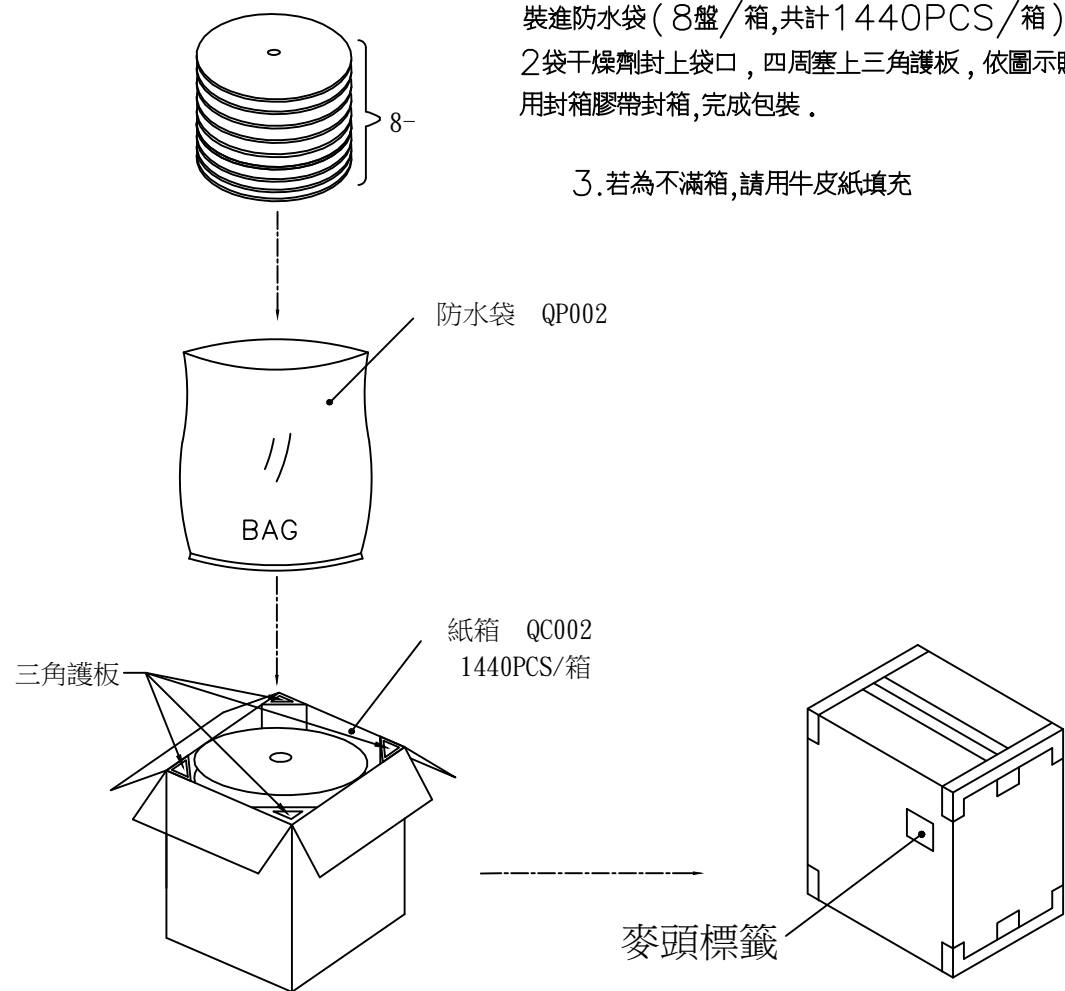

2. 將防水袋打開套入外箱內，再將封裝完成的盤子裝進防水袋 (8盤/箱,共計1440PCS/箱)，放進2袋干燥劑封上袋口，四周塞上三角護板，依圖示貼標籤用封箱膠帶封箱,完成包裝。

3. 若為不滿箱,請用牛皮紙填充

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

MJV12-KX06R-0606-LF

SERIES

REEL

06u" GOLD

NON EAR

BLACK

6P6C

LEADFREE

DESCRIPTION: