


RECOMMENDED PCB LAYOUT  
PCB THICKNESS: 1.6mm  
TOLERANCE: ±0.05mm (TOP VIEW)

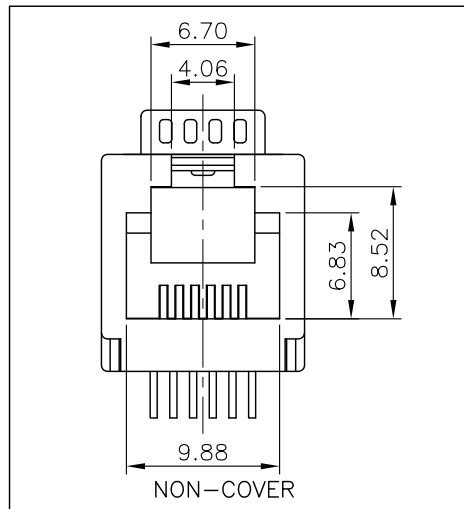

NOTE:  
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
  - 1.1 HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
  - 1.2 INSERT HOUSING & COVER: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
  - 1.3 CONTACTS: PHOSPHOR BRONZE.
  - 1.4 HOLD DOWN: BRASS.
2. FINISH:
  - 2.1 CONTACTS: GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27µm [50µ"] MIN. NICKEL UNDERPLATED OVERALL.
  - 2.2 HOLD DOWN: 1.27µm [50µ"] MIN. MATTE TIN PLATED.
3. "C" SHOWS QIP INSPECTION POINT.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.25  
.XX ± 0.13  
.XXX ± 0.05  
ANG ±

PJECTION

照片框

ORDER INFORMATION

MJV13-KX06C-0606-LF

SERIES  
LEADFREE  
6P6C  
COVER  
6u" GOLD  
NON EAR  
BLACK

DESCRIPTION: 6POSITION, SMT TYPE, TOP ENTRY PCB JACK

煜倫股份有限公司

www.morethanall.com