

PCB LAYOUT
Ref.


MATERIALS:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL 94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN—0.40mm THICK COPPER ALLOY,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

RoHS Compliant

TOLERANCES ARE

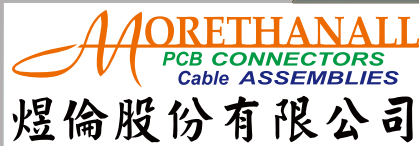

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJV15-KF06-0808-LF

SERIES | LEADFREE
8P8C
06u" GOLD
FLANGE
BLACK

DESCRIPTION: RJ45, TOP ENTRY JACK SMT TYPE

www.morethanall.com