


MATERIAL:

- HOUSING-PA9T GN2330  
HEAT RESISTANT PLOYAMIDE RESIN  
BLACK COLOR, UL94V-0
- INSERT HOUSING-PA9T GN2330  
HEAT RESISTANT PLOYAMIDE RESIN  
BLACK COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE  
PLATED WITH HARD GOLD AND  
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.30mm THICK COPPER ALLOY,  
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

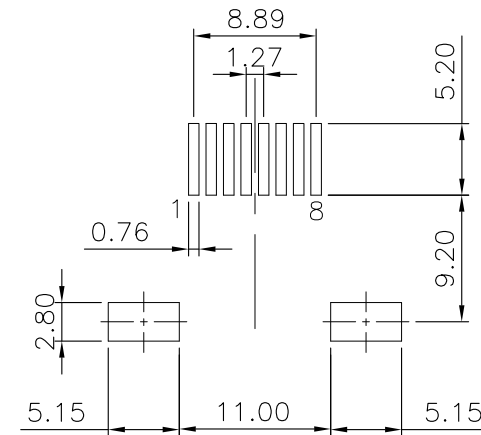

PCB LAYOUT

Ref.

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±  
.X±  
.XX±  
.XXX±  
ANG±



**ORDER INFORMATION**

MJW11-KX06-0808-LF

SERIES

LEADFREE

8P8C  
06u" GOLD  
NON EAR  
BLACK

DESCRIPTION: 10POSITION, SMT TYPE SIDE ENTRY PCB JACK