


COPLANARITY SPECIFICATION:
 WITH THE MODULAR JACK SITTING
 ON A LEVEL SURFACE.
 THE MAXIMUM GAP BETWEEN
 THE LEVEL SURFACE AND ALL
 TERMINAL TAILS AND BOTH FITTING
 NAILS IS 0.10mm

MATERIAL:

- HOUSING—PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN—0.30mm PHOS-BRONZE,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

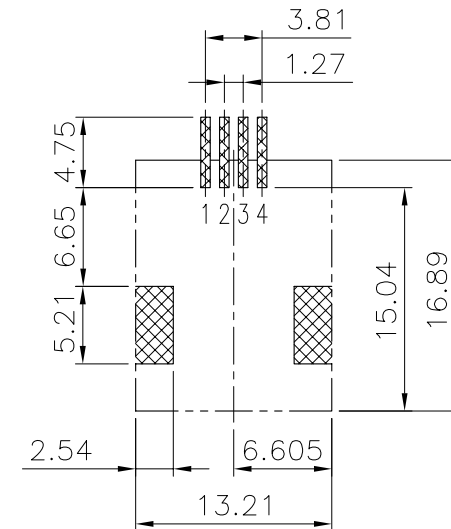

PCB LAYOUT
 Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

MJW11-KX06N-0604-LF

SERIES

LEADFREE

6P4C
INNER EAR

06u" GOLD

NON EARS

BLACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: RJ11, SMT TYPE, SHIELDLESS SIDE ENTRY PCB JACK