


COPLANARITY SPECIFICATION:
WITH THE MODULAR JACK SITTING
ON A LEVEL SURFACE.
THE MAXIMUM GAP BETWEEN
THE LEVEL SURFACE AND ALL
TERMINAL TAILS AND BOTH FITTING
NAILS IS 0.10mm

MATERIAL:

- HOUSING-PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.30mm PHOS-BRONZE,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

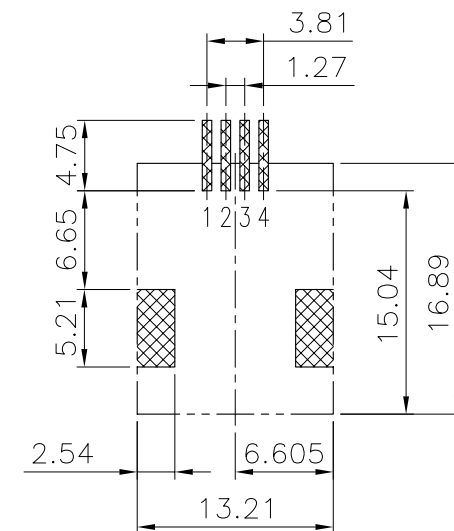

PCB LAYOUT

Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJW11-KX06N-0604-LF

SERIES

6P4C

LEADFREE

INNER EAR

06u" GOLD

NON EARS

BLACK

DESCRIPTION: RJ11, SMT TYPE, SHIELDLESS SIDE ENTRY PCB JACK