
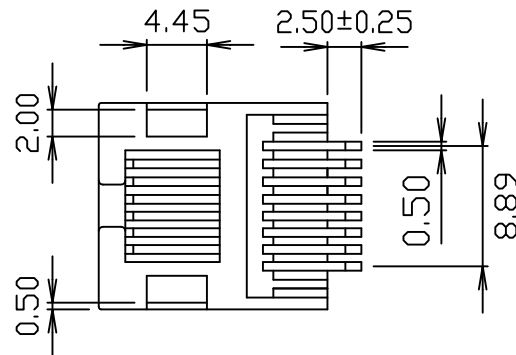



COPLANARITY:  
THE MAXIMUM DISTANCE  
BETWEEN LOWEST AND  
HIGHEST PIN WHEN  
HOUSING RESTS  
ON A FLAT SURFACE



MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)  
BLACK COLOR, UL94V-0
- OR-NYLON ZYTEL FR-52  
BLACK COLOR, UL94V-0
- TERMINAL-0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND TIN/LEAD  
IN SOLDER AREA.
- HOLD DOWN-0.35mm THICK COPPER ALLOY,  
PLATED WITH TIN-LEAD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

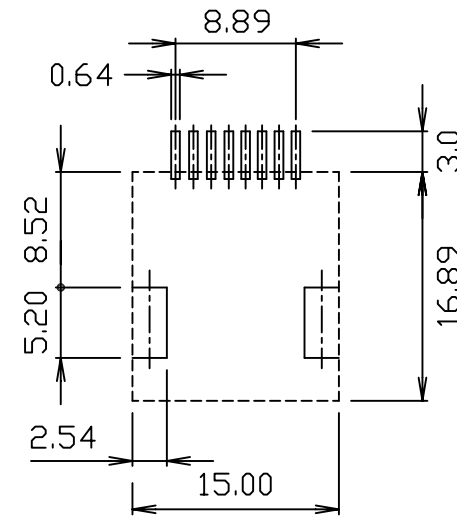

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ± 0.25  
.XX ± 0.13  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

MJW11-KX06N-0808-LF

SERIES | | | | LEADFREE  
8P8C  
INNER EAR  
06u GOLD  
NON POST  
BLACK

DESCRIPTION: 10PDS, 8 CONTACTS, SOLDER TAB-INSIDE LOW PROFILE 1 PORT,  
SIDE ENTRY SMT TYPE