
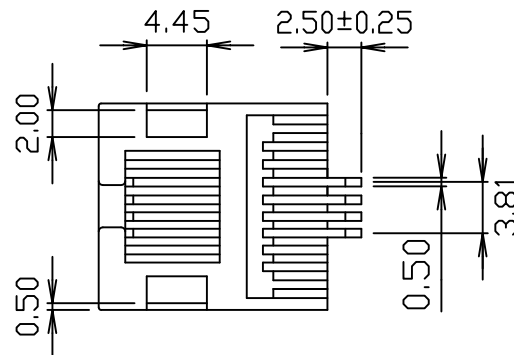


COPLANARITY:
THE MAXIMUM DISTANCE
BETWEEN LOWEST AND
HIGHEST PIN WHEN
HOUSING RESTS
ON A FLAT SURFACE




MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
BLACK COLOR, UL94V-0
- OR-NYLON ZYTEL FR-52
BLACK COLOR, UL94V-0

TERMINAL-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD
IN SOLDER AREA.

HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD.

CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

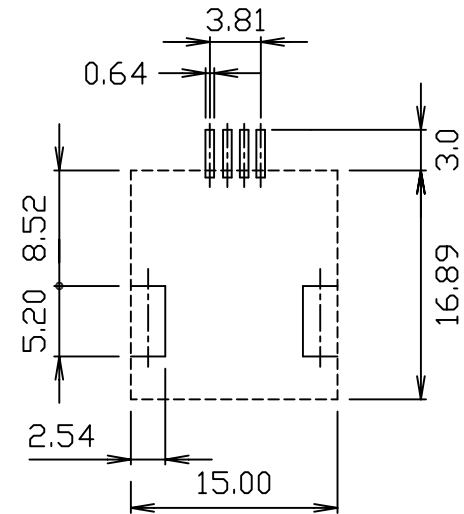

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PJECTION



ORDER INFORMATION

MJW11-KX06N-1004-LF

SERIES LEADFREE
10P04C
INNER EAR
06u GOLD
NON POST
BLACK

DESCRIPTION: 10PDS. 8 CONTACTS, SOLDER TAB-INSIDE
LOW PROFILE 1 PORT, SIDE ENTRY SMT TYPE