

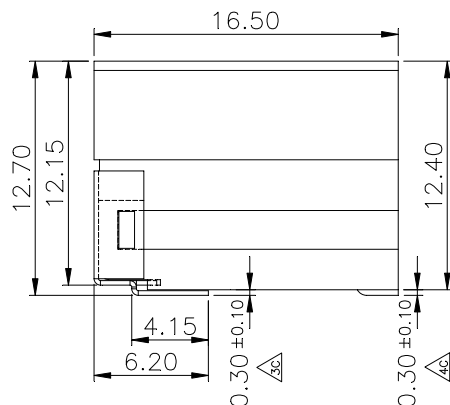
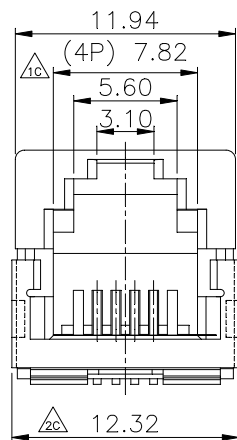


MATERIALS:  
 PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0.  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.  
 TIN PLATING OVER NICKEL IN SOLDER AREA.  
 SOLDER PAD: BRASS PLATED TIN ALLOY

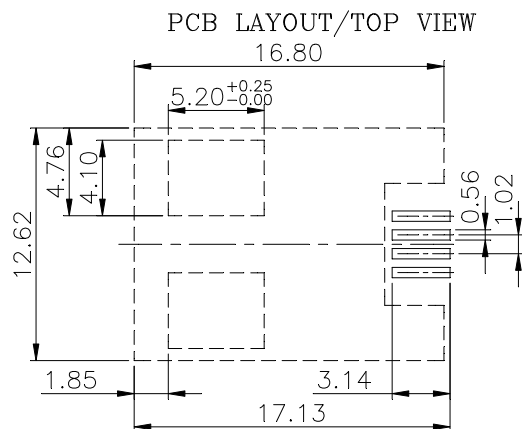

成品上PCB板情形

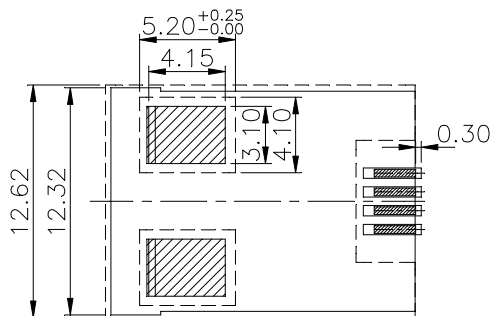

※ 凡標註記號者, 為品管檢驗之尺寸

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MJW12U-KX06N-0404-LF

SERIES

LEADFREE

4P4C


INNER EAR

06u"


NON POST

BLACK

DESCRIPTION: SIDE ENTRY PCB JACK(4P4C)


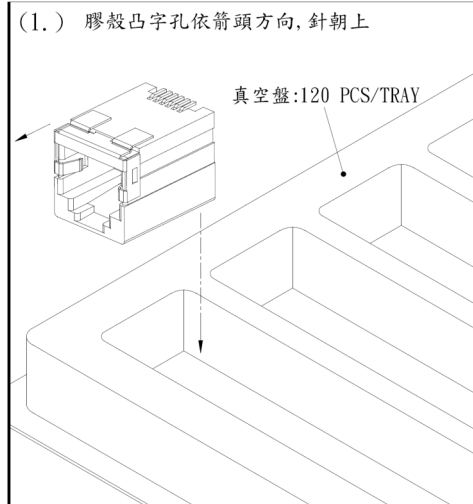


1. 請將組立完成之成品依圖面標示方向順序放入真空盤內.

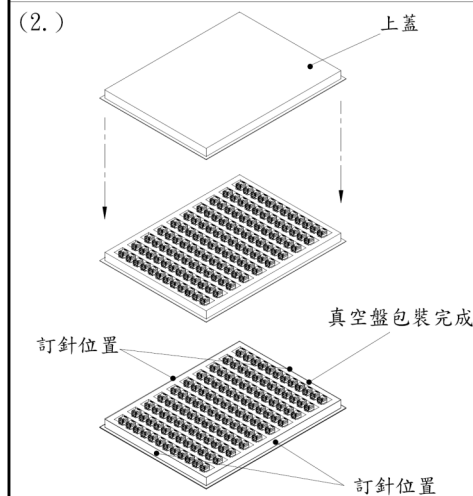

2. 成品依序放入真空盤後, 蓋好上蓋於真空盤, 四面用訂書機訂針完成.

※成品置於真空盤時如有空隙一律塞泡棉

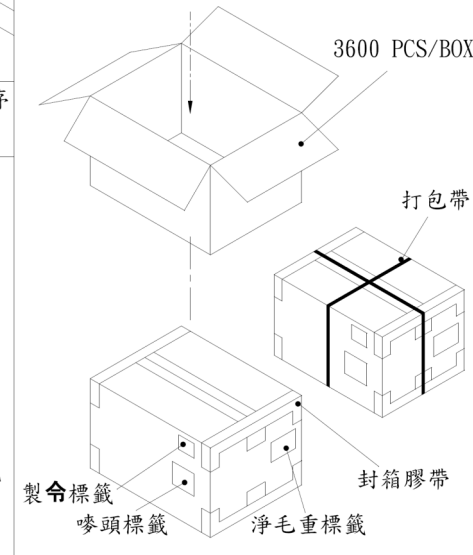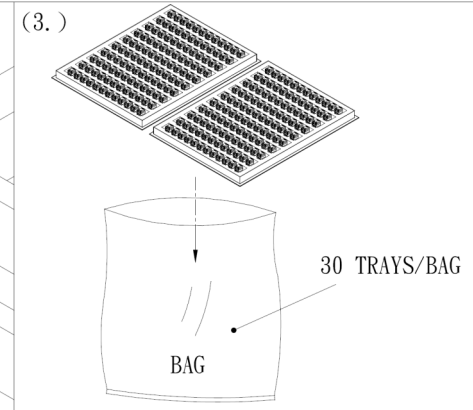

3. 將防水袋打開套入外箱內, 再將裝訂完成之真空盤放入外箱中(左右各15盤)依圖示貼標籤, 以封箱膠帶封箱, 依圖示打包.

4. 若為不滿箱, 請用牛皮紙填充.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm 0.50$

.X  $\pm 0.38$

.XX  $\pm 0.25$

.XXX  $\pm 0.10$

ANG  $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

MJW12U-KX06N-0404-LF

SERIES

LEADFREE

4P4C

INNER EAR

06u"

NON POST

BLACK

DESCRIPTION: SIDE ENTRY PCB JACK(4P4C)