

NOTE:







CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.2 INSERT HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE.

2. FINISH:

- 2.1 CONTACTS: GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED OVERALL.

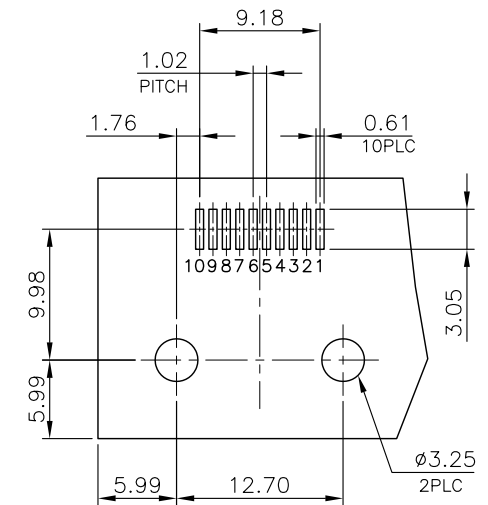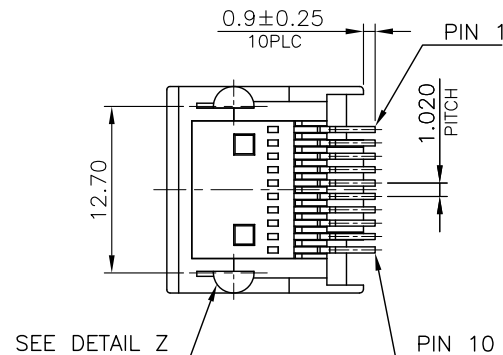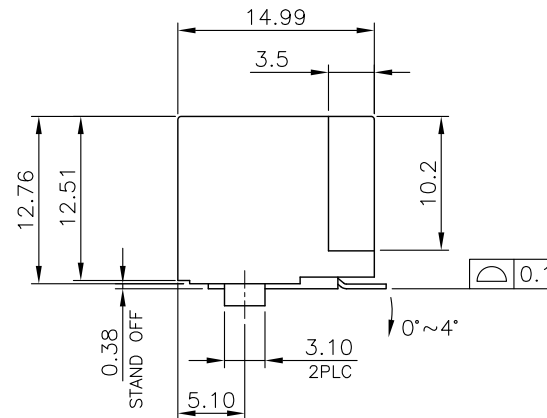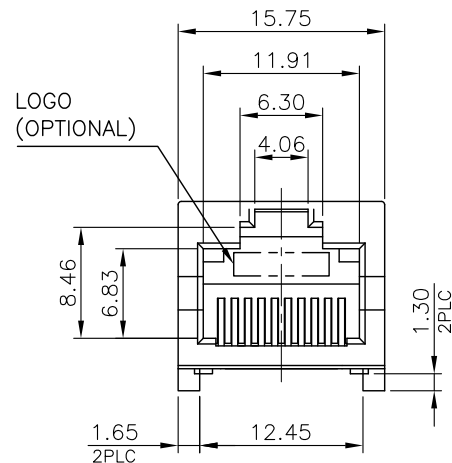

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: $\pm 0.05\text{mm}$ (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$

照片框

ORDER INFORMATION

MJW12U-KX06P-1010-LF

SERIES

LEADFREE

10P10C

POST

06u" GOLD

NON EAR

BLACK

DESCRIPTION: MODULAR JACK, 10POSITION, SMT TYPE, W/O SHELL, SIDE ENTRY