
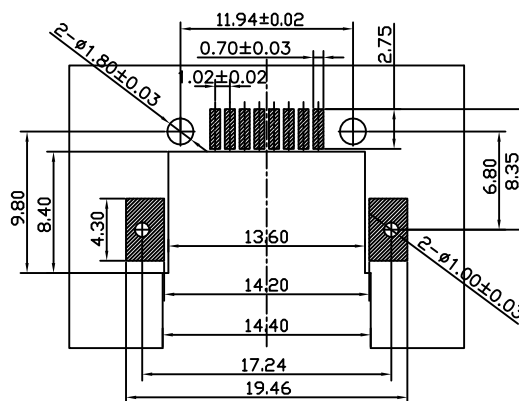
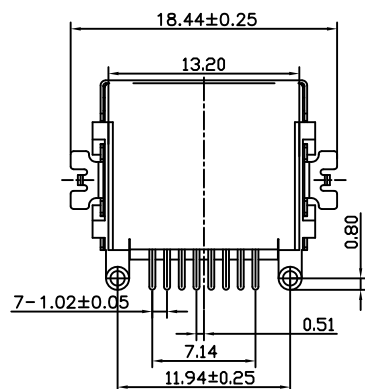
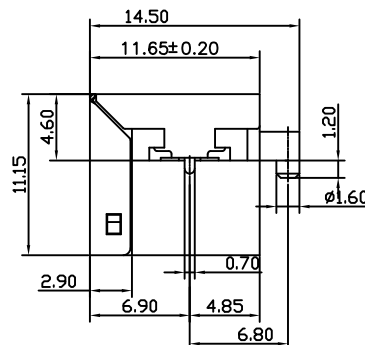
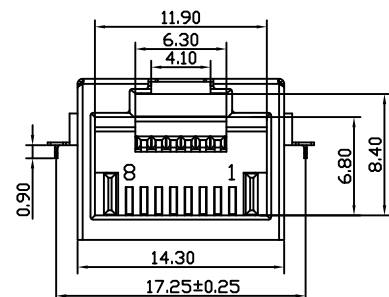



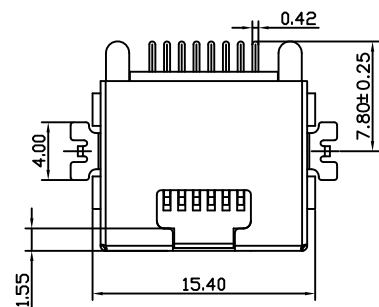

PCB BOARD LAYOUT

NOTES.

ELECTRICAL:

1. VOLTAGE RATING:125V AC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:50mΩ MAX
4. INSULATION RESISTANCE:500MΩ MIN @500VDC
5. DIELECTRIC STRENGTH VOLTAGE: 500V AC RMS 50HZ.1MIN.

MECHANICAL:

- 1: HOUSING MATERIAL:LCP(UL94V-0)
- 2: CONTACT MATERIAL:PHOSPHOR BRONZE
SELECTIVE GOLD PLATING IN THE CONTACT AREA AND SELECTIVE TIN PLATING
IN THE SOLDER TAIL AREA WITH 60u" NICKEL UNDER PLATING OVERALL
- 3: PLATING:GOLD PLATING OVERALL NICKEL
- 4: OPERATING LIFE:3000 CYCLES MIN
- 5: PCB RETENTION PRE-SOLDER: 1LB MIN
- 6: PCB RETENTION POST-SOLDER: 10LB MIN

ENVIRONMENTAL:

OPERATION TEMPERATURE:-40°C~+85°C
STORAGE TEMPERATURE:-40°C~+85°C
IR REFLOW PEAK SOLDERING TEMPERATURE:255~265°C 5~10SEC
MATES WITH MODULAR PLUG COMFORMING TO FCC PART 68,SUBPART F.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.075
ANG ±

照片框

ORDER INFORMATION

MJWF04U-KX15MP-0808-LF

SERIES

8P8C

METAL POST

15u" GOLD

NON EAR

BLACK

LEADFREE

DESCRIPTION: RJ45 W/O TR Sink Profile