
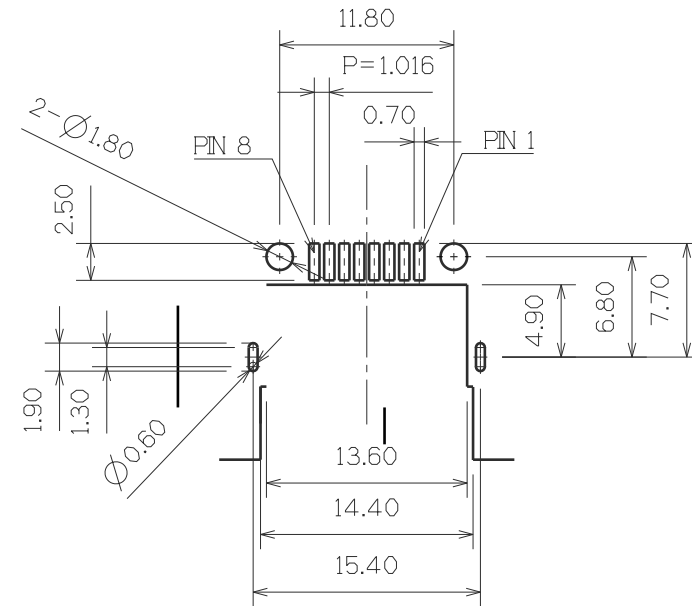

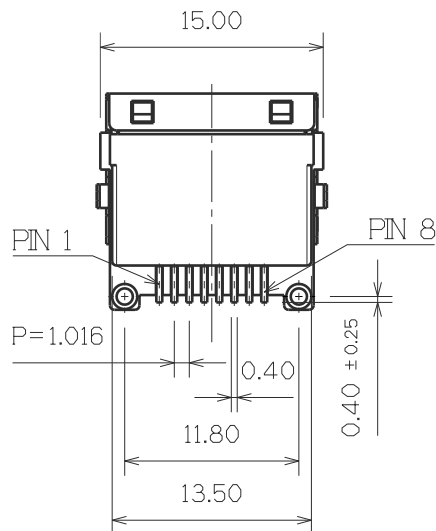
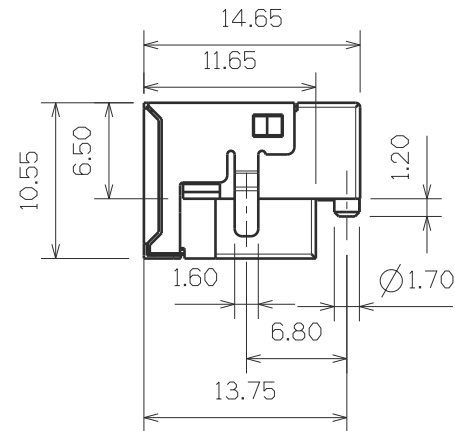




PCB LAYOUT

MATERIAL AND FINISH

HOUSING : LCP POLYESTER UL-94V-0 MIXED GLASS FIBER.
STANDARD COLOR FIBER.

CONTACT : 0.30mm THICK PHOSPHOR BRONZE PLATED WITH NICKEL.

CONTACT PLATED : GOLD 3u".

SHIELD : 0.20mm THICK COPPER ALLOY PLATED WITH NICKEL.

ELECTRICAL:

1. CURRENT RATING : 1.5 AMP.
2. VOLTAGE RATING : 150 VAC.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MILLIOHMS MIN.
5. DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC, 1MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.25
.XXX ± 0.05
ANG ± 1°

PPOJECTION



ORDER INFORMATION

MJWF06U-KX06MP2-0808-LF

SERIES

8P8C

METAL+ POSTx2

06u" GOLD

NON EAR

BLACK

LEADFREE

DESCRIPTION: