
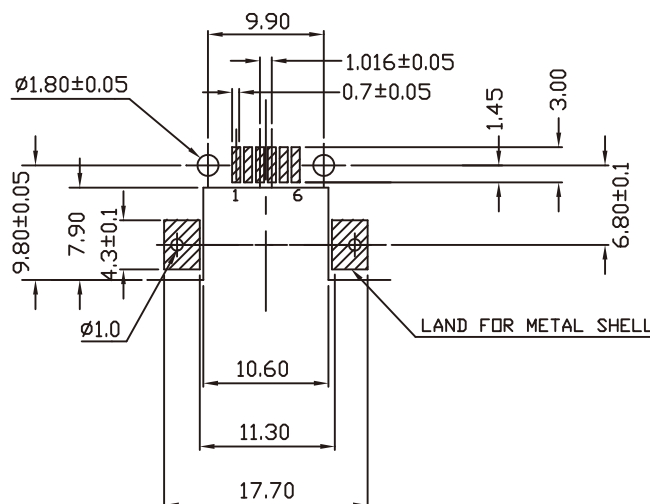
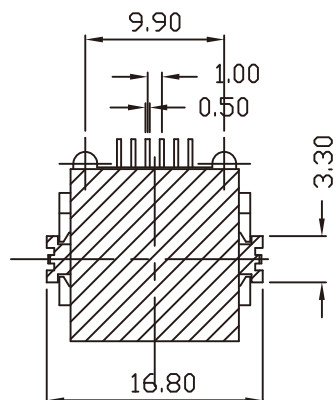
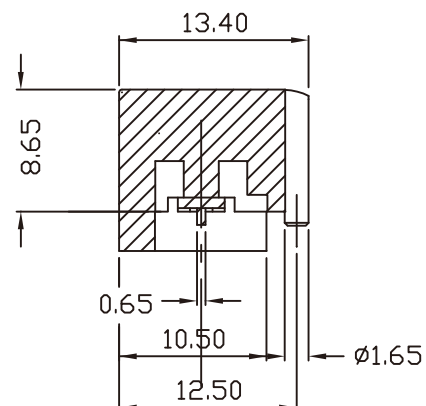


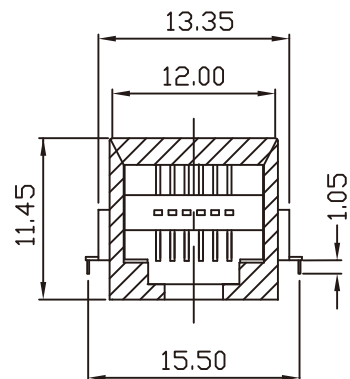

PCB LAYOUT

SPECIFICATIONS

MATERIAL:

1. Housing : PPS. Polyester UL94V0
2. Color : Black
3. Contacts : Selective Gold Plating
4. Shield : 0.20mm Thickness C2680 Alloy With Au and Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJWF08-KX06MP2-0606-LF

SERIES

LEADFREE

6P6C

METAL+POSTx2

06u" GOLD

NON EAR

BLACK

DESCRIPTION: RJ11 6P Shielded Modular Jack (SMT)