
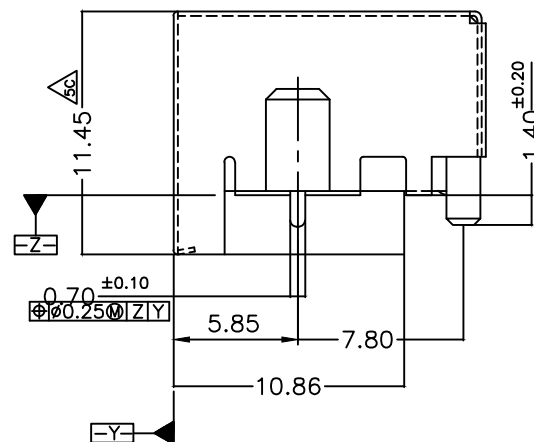
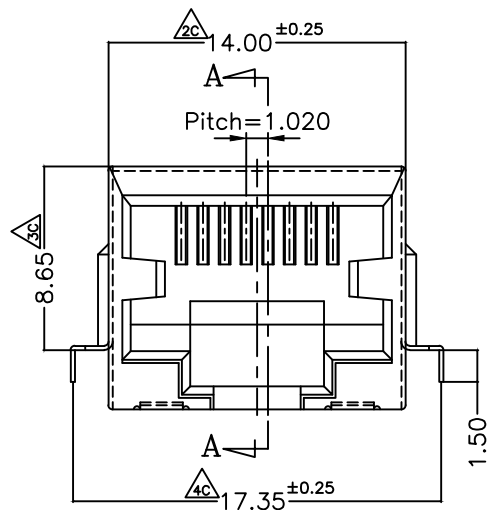
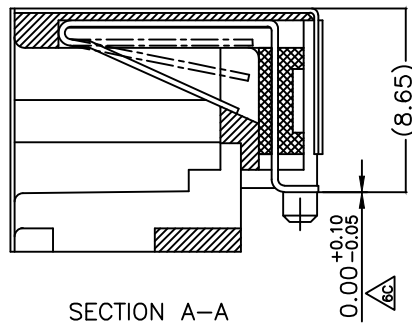


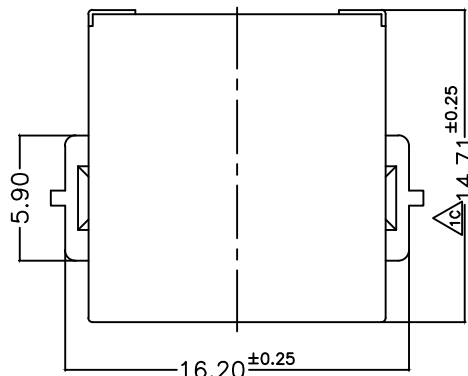

MATERIALS:

PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC


FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELD: BRASS PLATING NICKEL ALLOY.

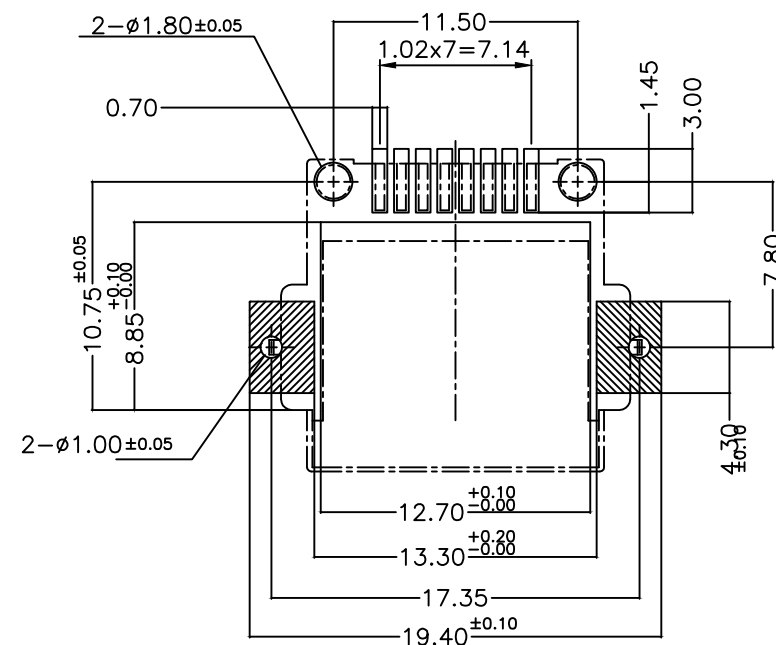

RECOMMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)

Electrical:

1.Voltage Rating:125 Vac Rms.

2.Current Rating:1.5 Amp.

3.Contact Resistance:40 Milliohms Max.

4.Insulation Resistance:1000 Megohms Min @500 Vdc.

5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

1.Operating:750 Cycles Min.

Environmental:

1.Storage:-40°C To +85°C.

2.Operation:-20°C To +75°C.

3.IR Reflow Soldering Temperature:255°C To 265°C(5~10 Seconds).

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
X. ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

MJWF08-KX06MP2-0808-LF

SERIES

LEADFREE

8P8C

METAL+POSTx2

06u" GOLD

NON EAR

BLACK

DESCRIPTION: