


MATERIALS:  
 PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0.  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.  
 TIN PLATING OVER NICKEL IN SOLDER AREA.  
 SHIELD: BRASS PLATING NICKEL ALLOY.

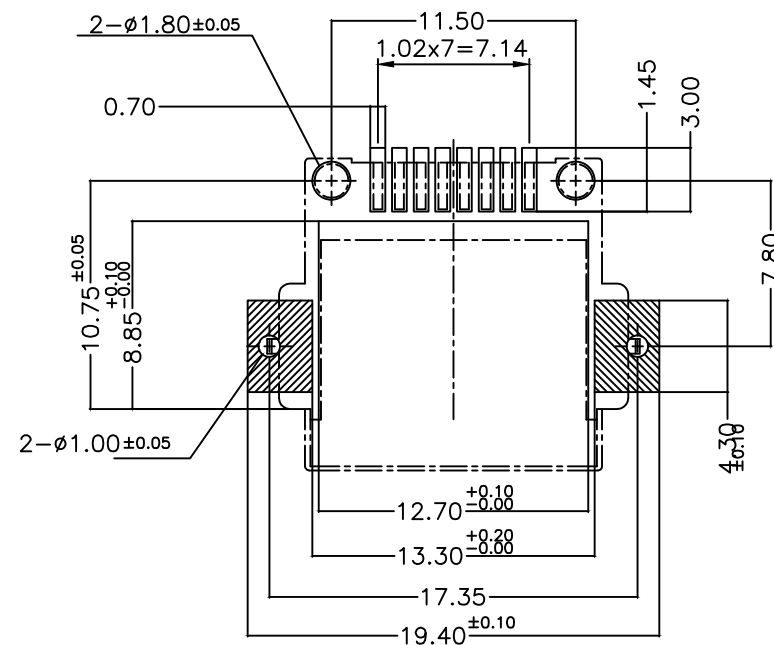

**Electrical:**  
 1.Voltage Rating:125 Vac Rms.  
 2.Current Rating:1.5 Amp.  
 3.Contact Resistance:40 Milliohms Max.  
 4.Insulation Resistance:1000 Megohms Min @500 Vdc.  
 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

**Mechanical:**  
 1.Operating:750 Cycles Min.

**Environmental:**  
 1.Storage:-40°C To +85°C.  
 2.Operation:-20°C To +75°C.  
 3.IR Reflow Soldering Temperature:255°C To 265°C(5~10 Seconds).  
 Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.10

ANG ± 3°

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MJWF08-KX06P-0808-LF

SERIES | | | | | | | | LEADFREE  
 | | | | | | | | 8P8C  
 | | | | | | | | POST  
 | | | | | | | | 06u" GOLD  
 | | | | | | | | NON EAR  
 | | | | | | | | BLACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: