



一、Mechanical Dimensions

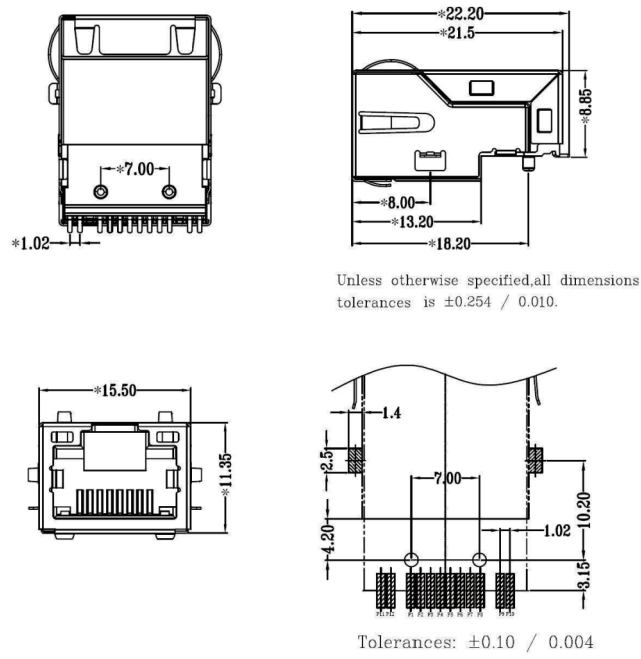

二、Schematics

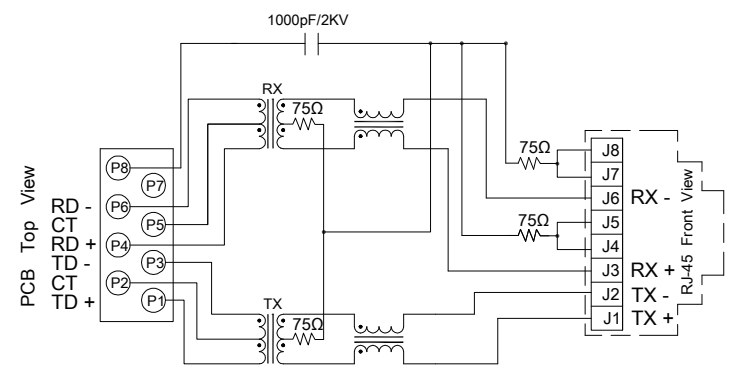

Standard LED	Wavelength	Forward*V(MAX)	TYP
Green	565nm	2.5v	2.2v
Yellow	585nm	2.5v	2.1v

With a forward current of 20mA

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

MJWF08T25UL-KF06EP2GY-0808-LF

SERIES

BLACK

06u" GOLD

FULL SPRING

8P8C

GREEN / YELLOW

LEADFREE

DESCRIPTION: RJ45 ICM (10/100 Base-T 1 Port)

四、Notes:

- CONNECTOR MATERIAL:
HOUSING:LCP BLACK UL94 V-0
INSERTER:LCP BLACK UL94 V-0
SHIELD:Brass
SHIELD PLATING:NICKEL
CONTACT:COOPER ALLOY
CONTACT PLATING:SELECTIVE GOLD, 6 MICRO-INCHS MIN IN CONTACT AREA
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
- RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
- THE PART IS RECOMMENDED FOR IR REFLOW PROCESS PEAK SOLDERING
TEMPERATURE IS 265° C MAX, 40 SECS MAX
- STORAGE TEMPERATURE T=-40° C TO +85° C.
- ALL CRITICAL DIMENSIONS WITH “*”

五、Packaging

- packaging unit : 50 PCS/tray
outer carton unit 1400 pcs/ 28Trays/box

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION 

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJWF08T25UL-KF06EP2GY-0808-LF

SERIES

BLACK

06u" GOLD
FULL SPRING

EAR+POST

GREEN / YELLOW

8P8C

LEADFREE

DESCRIPTION: RJ45 ICM (10/100 Base-T 1 Port)