


# 一、Mechanical Dimensions

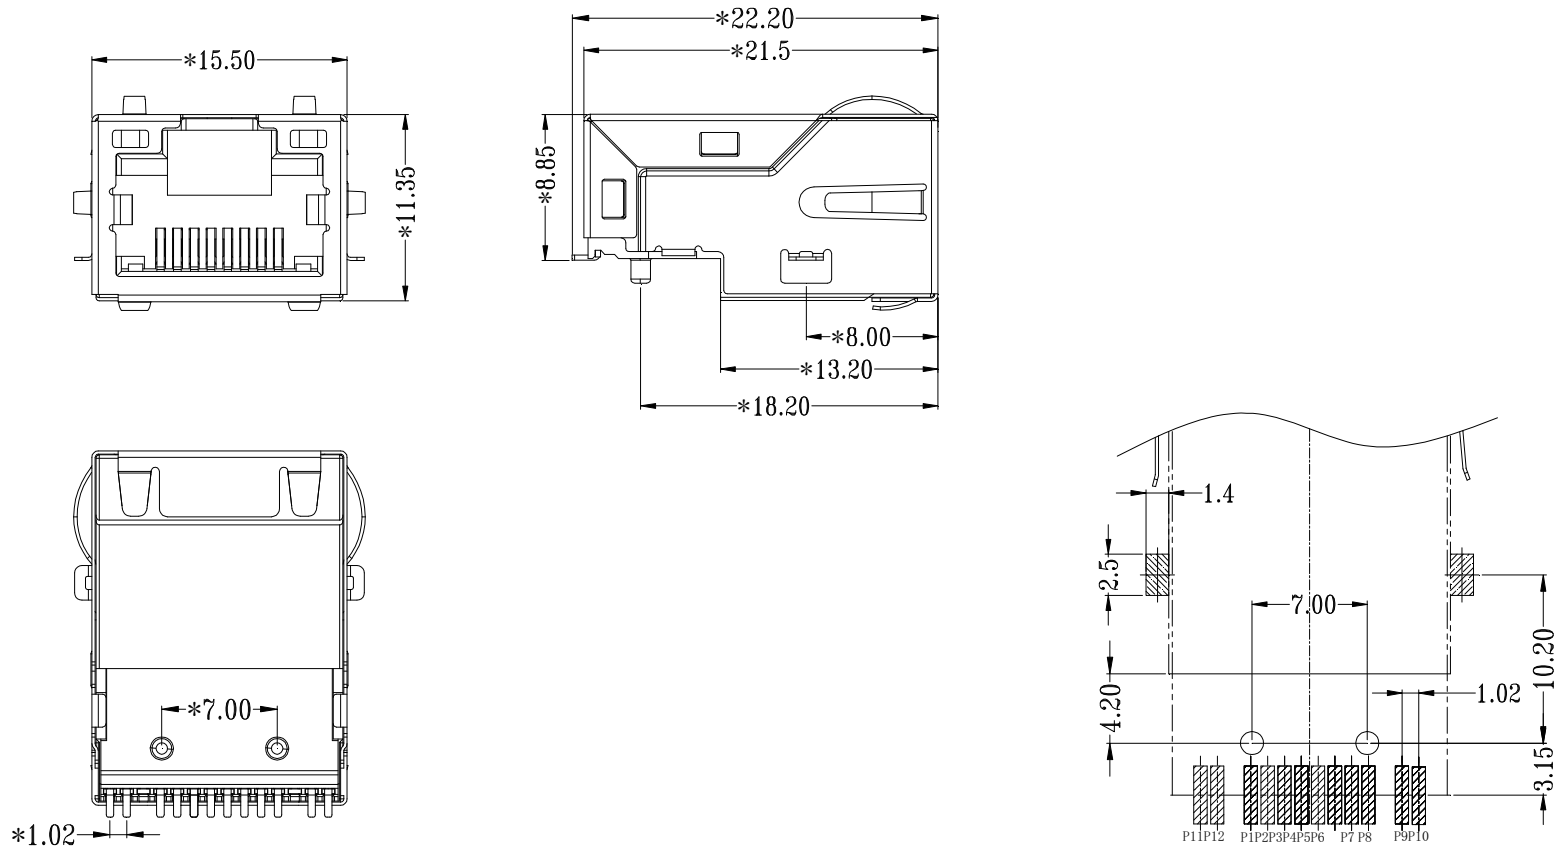

UNIT:mm Unless otherwise specified, all tolerances are  $\pm 0.25$

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.  $\pm$

CHECKED BY GENIUS

.X  $\pm$

UNIT / mm

SCALE 1 : 1

.XXX  $\pm$

DATE


ANG  $\pm$

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION



ORDER INFORMATION

MJWF08T25UL-KF06EP2YG-0808-LF

SERIES

BLACK

06u" GOLD

EAR+POST

FULL SPRING

8P8C

YELLOW / GREEN

LEADFREE

DESCRIPTION: Rj45 ICM (10/100 Base-T 1 Port)



## 四、Mechanicals

- CONNECTOR MATERIAL:  
 HOUSING:LCP BLACK UL94 V-0  
 INSERTER:LCP BLACK UL94 V-0  
 SHIELD:Brass  
 SHIELD PLATING:NICKEL  
 CONTACT:COOPER ALLOY  
 CONTACT PLATING:SELECTIVE GOLD, 6 MICRO-INCHS MIN IN CONTACT AREA
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
- RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
- THE PART IS RECOMMENDED FOR IR REFLOW PROCESS PEAK SOLDERING TEMPERATURE IS 265° C MAX, 40 SECS MAX
- OPERATING TEMPERATURE T=-40° C TO +85° C.
- STORAGE TEMPERATURE T=-40° C TO +85° C.
- ALL CRITICAL DIMENSIONS WITH "\*"

## 五、Packaging

- packaging unit : 50 PCS/tray
- outer carton unit : 1400pcs/ 28 tray /box

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION 



ORDER INFORMATION

MJWF08T25UL-KF06EP2YG-0808-LF

SERIES

BLACK | 06u" GOLD FULL SPRING | EAR+POST | YELLOW / GREEN | 8P8C LEADFREE

DESCRIPTION: Rj45 ICM (10/100 Base-T 1 Port)