


MATERIALS:

- HOUSING—DSM STANYL TE250F6 (NYLON46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
 - CONTACTS—0.35mm THICK. PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH
IN SOLDER AREA.
 - SHIELD—0.25mm THICK. COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

TINNED, SOLDER AREA

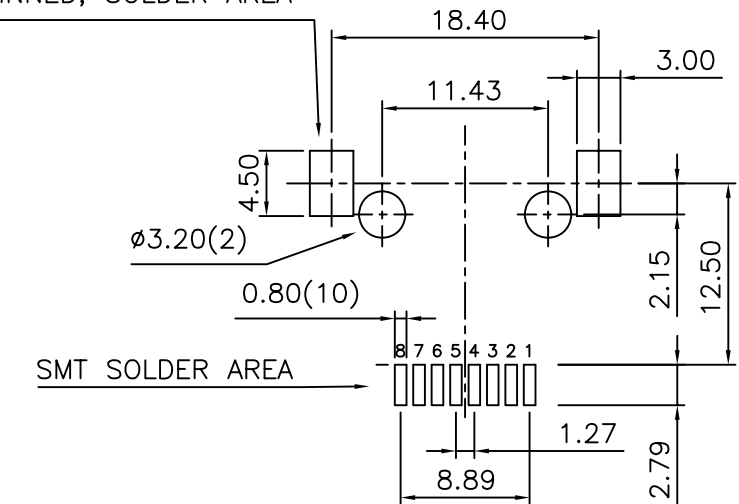

**PCB LAYOUT
Ref.**

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

MJWF12-KF06EP2-0808-LF

SERIES

BLACK

06u" GOLD

FULL SPRING

POST

EAR

8P8C

LEADFREE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 8POSITION SIDE ENTRY, SMT TYPE VERY LOW PROFILE, SHIELDLESS PCB JACK