


- MATERIALS:**
- HOUSING—DSM STANYL TE250F6 (NYLON46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
 - CONTACTS—0.35mm THICK. PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH
IN SOLDER AREA.
 - SHIELD—0.25mm THICK. COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

MJWF12-KF06P-1010-LF
LEADFREE

TINNED, SOLDER AREA

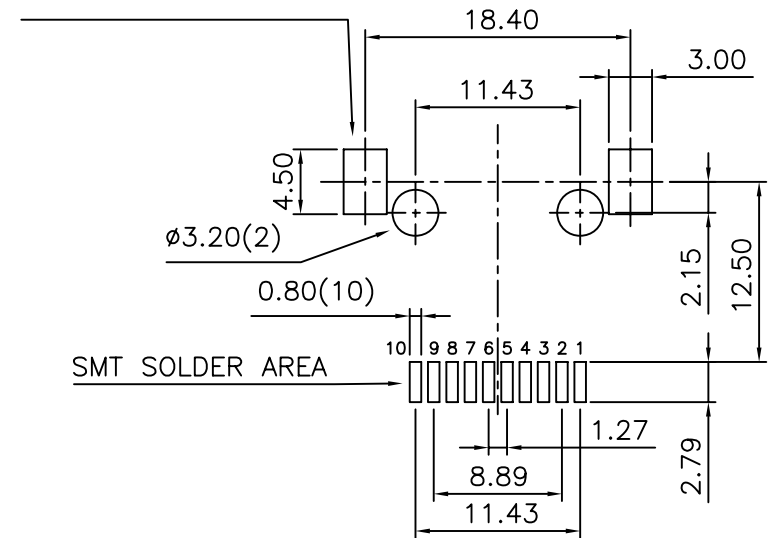

RoHS Compliant

PCB LAYOUT
Ref.

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MJWF12-KF06P-1010

DWG NO. MJWF12-KF06P-1010

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

10 & 8 POSITION SIDE ENTRY, SMT TYPE
VERY LOW PROFILE, SHIELDLESS PCB JACK

REVISIONS

HK

DATE

焯倫股份有限公司