
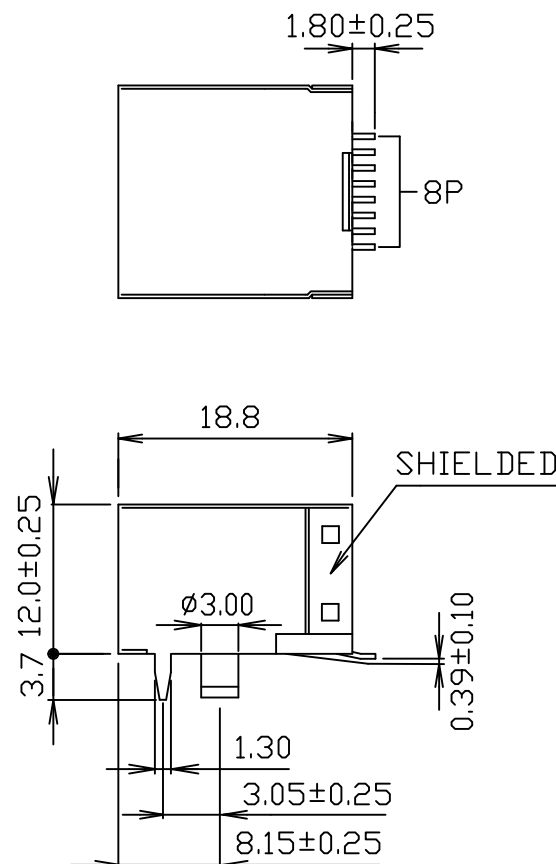
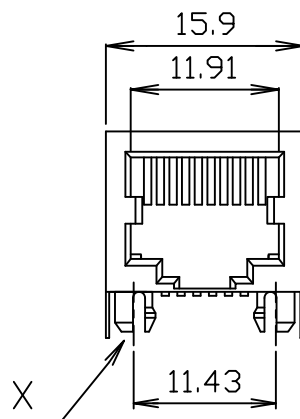




COPLANARITY:

THE MAXIMUM DISTANCE (0.10mm)
BETWEEN LOWEST AND
HIGHEST PIN WHEN
BOTTOM OF PART PUT
ON A FLAT SURFACE

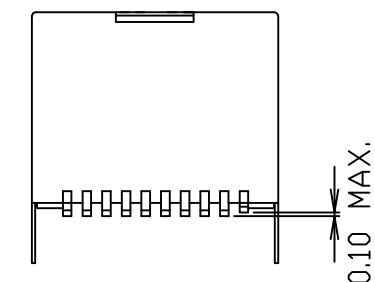

MATERIALS:

- HOUSING-NYLON ZYTEL FR-50
HEAT DEFLECTION TEMP.255°
BLACK ODOR, UL94V-0
 - CONTACTS -0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD
IN SOLDER AREA.
 - SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

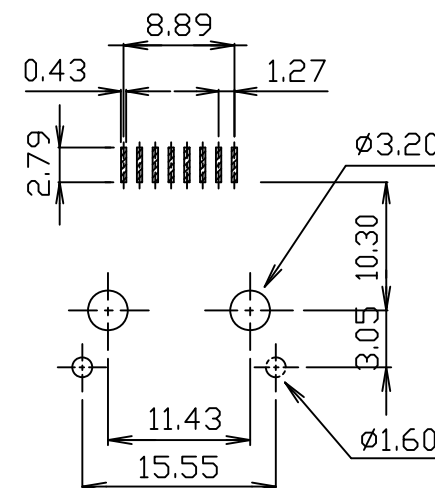

PC Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MJWF12-KX06A3-0808-LF

SERIES 8P8C LEADFREE
BLACK 06u" GOLD FRONT TAB 3.05mm
NON EAR

DESCRIPTION: 10POSITION SIDE ENTRY SMT TYPE VERY LOW PROFILE,
SHIELDED PCB JACK