

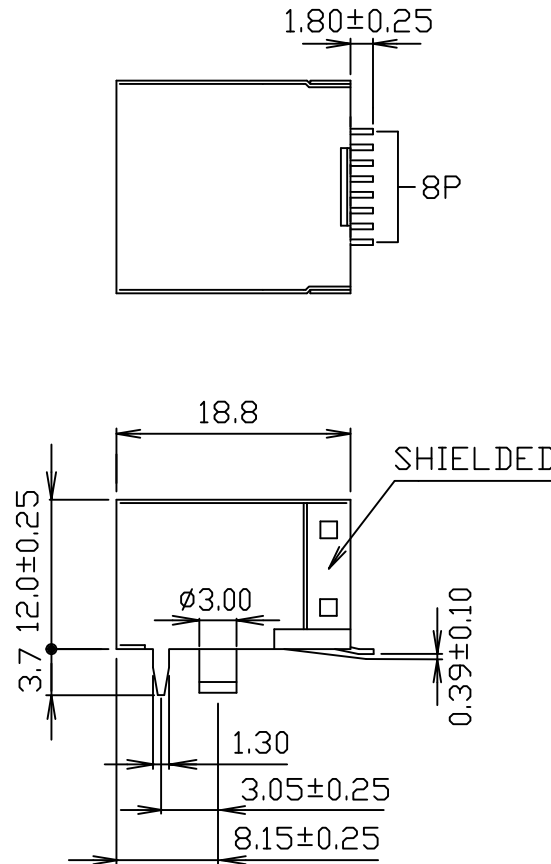


COPLANARITY:
 THE MAXIMUM DISTANCE (0.10mm)
 BETWEEN LOWEST AND
 HIGHEST PIN WHEN
 BOTTOM OF PART PUT
 ON A FLAT SURFACE

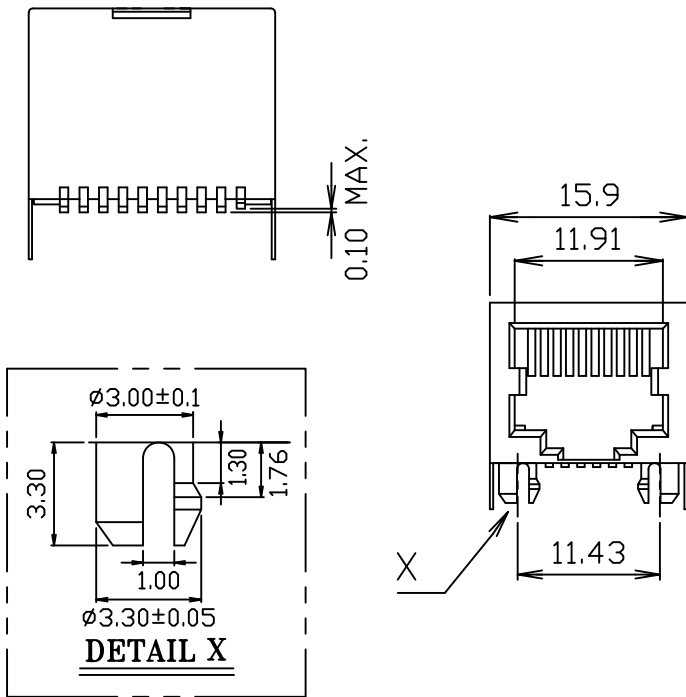

MATERIALS:

- HOUSING-NYLON ZYTEL FR-50
 HEAT DEFLECTION TEMP.255°
 BLACK ODDOR, UL94V-0
 - CONTACTS -0.35mm THICK PHOS-BRONZE PLATED
 WITH HARD GOLD AND TIN/LEAD
 IN SOLDER AREA.
 - SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

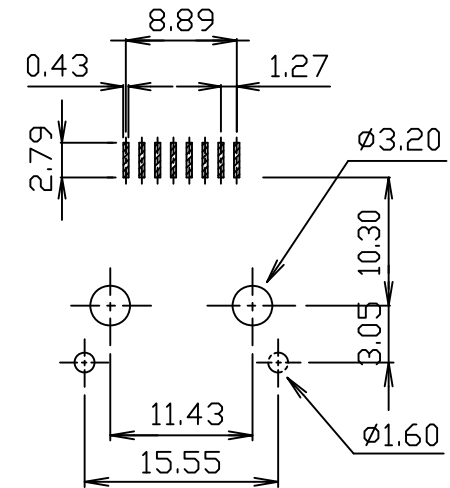

PC Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

MJWF12-KX06A3-1008-LF

SERIES | LEADFREE
 10P8C
 FRONT TAB 3.05mm
 BLACK | 06u" GOLD
 NON EAR

DESCRIPTION: 10POSITION SIDE ENTRY SMT TYPE VERY LOW PROFILE,
 SHIELDED PCB JACK