


四、RoHS compliant type

Our RoHS parts just can withstand IR Reflow peak temperature: 260degC+/-5degC as the following profile:

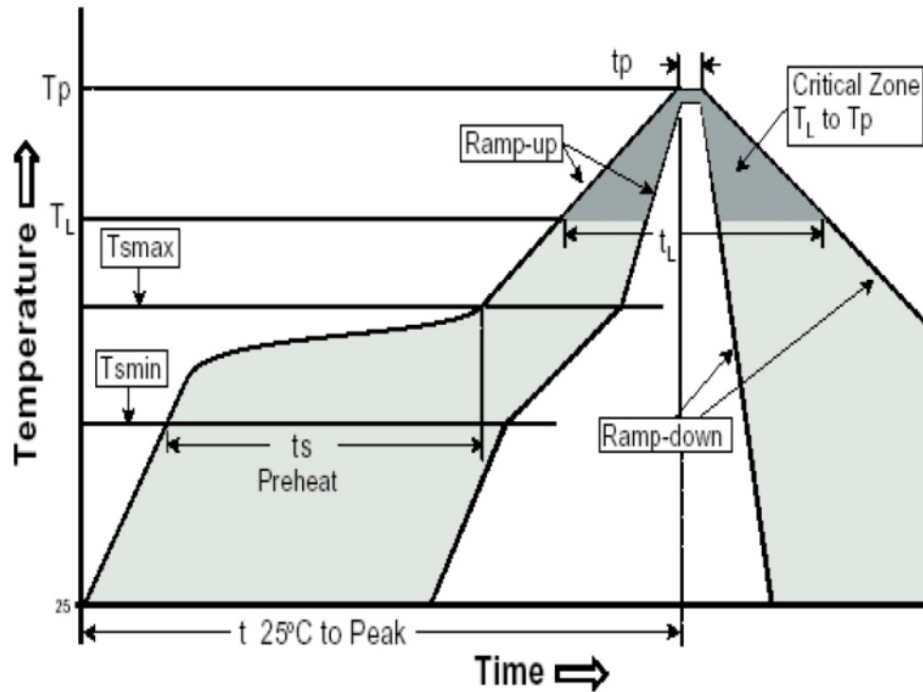

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate ($T_{s \max}$ to T_p)	3°C /second max.
Preheat -Temperature Min ($T_{s \min}$) -Temperature Max ($T_{s \max}$) -Time ($t_{s \min}$ to $t_{s \max}$)	100°C 150°C 60-120 seconds
Time maintained above: -Temperature (T_L) -Time (t_L)	183°C 60-150 seconds
Peak/Classification Temperature (T_p)	260±5°C
Time within 5°C of actual Peak Temperature (t_p)	10-20 seconds
Ramp-Down Rate	6°C/seconds max
Time 25°C to Peak Temperature	6 minutes max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MJWF13T56UL-KX06NX1GYR-0808-LF

SERIES

BLACK

NON SPRING

06u" GOLD

REEL

LEFT:GREEN / RIGHT:YELLOW

NON POST

INNER EAR

LEADFREE

8P8C

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

五、Mechanicals

Housing Material:

MATERIAL:Fr52 STANDARD COLOR:BLACK

Insert Material:

MATERIAL:Phos-Bronze C5210 EH---0.35mm Thickness

Insert -PBT GF UL94V-0

- 1.PLATING(1) NICKEL
- 2.PLATING(2) 100%Sn
- 3.PLATING(3) GOLD (3u " ~50u ")

Plate Material:

PBT GF UL 94V-0

Contact pin Material:

MATERIAL: Phos-Bronze C5191 ---0.35mm Thickness

- 1.PLATING(1) NICKEL
- 2.PLATING(2) 100%Sn


Shielding Material:

BRASS C2680 PLATING NICKEL

Operating Life:750 Cycles MIN.

Environmental:


- 1.Storage Temp:-40°C TO +85°C.
- 2.Operating Temp: -40°C TO +85°C
3. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPARTF.

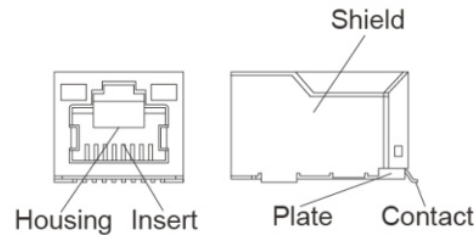

七、Packaging

Packing Information


- 1.Tape & Reel-----150pcs/1Roll
2. Packaging material: PS

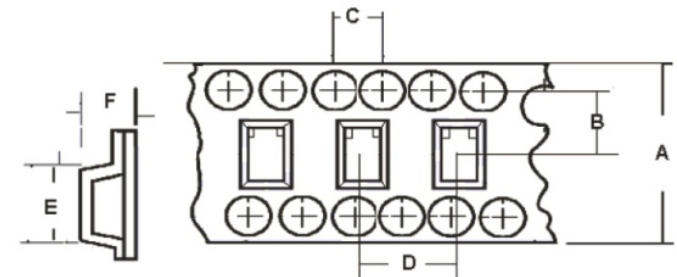

Tape Size(mm)

A	B	C	D	E	F
44.0±0.3	20.2±0.1	4.0±0.1	28.0±0.1	25.3±0.1	14.4±0.1

3.outer carton unit: 900pcs/ 6Roll /box



Unit:cm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

MJWF13T56UL-KX06NX1GYR-0808-LF

SERIES

BLACK
NON SPRING
06u" GOLD

REEL
LEFT:GREEN / RIGHT:YELLOW
NON POST
INNER EAR

LEADFREE
8P8C

DESCRIPTION: