


MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

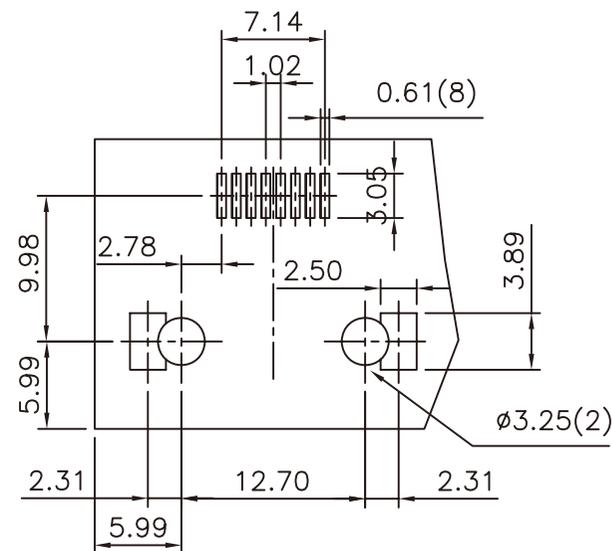

PCB LAYOUT

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



**ORDER INFORMATION**

**MJWF13U-KF06EP1-0808-LF**

SERIES

LEADFREE

8P8C

EAR+POST/1

06u" GOLD

WITH PANEL GROUND

BLACK

DESCRIPTION: MODULAR JACK, RJ45, WITHOUT LED'S  
SHIELDED, SMT TYPE, SIDE ENTRY

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)