


MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

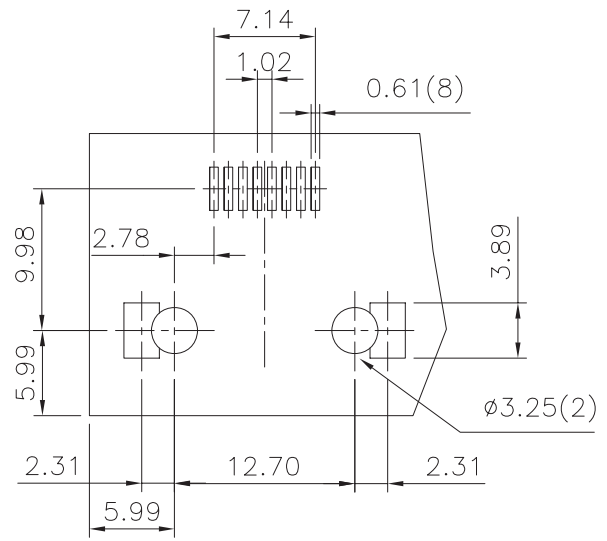

PCB LAYOUT
Ref.

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

X.±

CHECKED BY GENIUS

.XX±

UNIT / mm

SCALE 1 : 1


.XXX±

DATE

ANG±

SIZE A4

P PROJECTION



ORDER INFORMATION

MJWF13U-KX06EP1-0808-LF

SERIES

8P8C
LEADFREE
EAR+POST
06u" GOLD
NON EAR
BLACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MODULAR JACK, RJ45, WITHOUT LED'S SHIELDED, SMT TYPE, SIDE ENTRY