

- 1. MATERIALS:**
- HOUSING:** ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOR: BLACK
 - CONTACTS:** PHOSPHOR BRONZE
 - PLATING:** 50 μ " [1.27 MICRONS] MIN. GOLD ON MATING SURFACES.
50 μ " [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 μ " [2.54 MICRONS] MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.
 - SHIELD:** COPPER ALLOY PLATED PURE-TIN ALLOY
 - LIGHT PIPE:** CLEAR POLYCARBONATE RATED UL 94V-0.
- 2. COPLANARITY SPECIFICATION:**
WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE OF SHIELD TAB AND ALL TERMINAL TAILS IS .004 [0.10].

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES


煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X, \pm X, \pm .XX \pm .XXX \pm ANG \pm
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

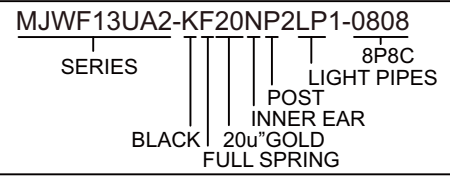

DESCRIPTION: 2 PORT, SURFACE MOUNT, RJ45, MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED, LIGHT PIPES -ROHS COMPLIANT