

**Material**  
 Housing : 9T Polyester UL-94V-0 Mixed Glass Fiber.  
 Standard Color Fiber.  
 Contact : 0.35mm Thick Phosphor Bronze Plated With Nickel.  
 Contact Plated : Gold 3u".  
 Shield : 0.25mm Thick Copper Alloy Plated With Nickel.

**Electrical:**  
 1. Current Rating : 1.5 A.  
 2. Voltage Rating : 150 VAC.  
 3. Contact Resistance : 30mΩ Max..  
 4. Insulation Resistance : 500MΩ Min.  
 5. Dielectric Withstanding Voltage : 500 VAC 1minute..


**RoHS Compliant**

TOLERANCES ARE

X, ±
.X ± 0.50
.XX ± 0.25
.XXX ± 0.05
ANG ±



**ORDER INFORMATION**

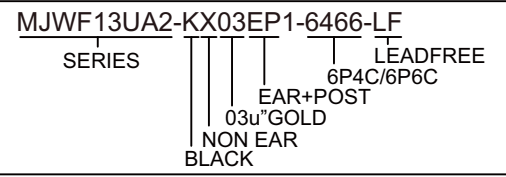

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

DESCRIPTION: