



PIN OUT

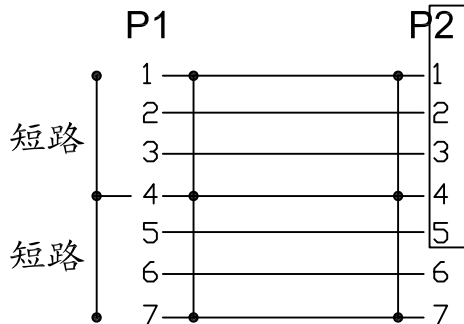

PH2.54 端子

8	TERMINAL 2.54mm MK-T-22	2	PCS
7	HOUSING 2.54mm MK-H-02	1	SET
6	PVC:45P 黑色		Kg/K
5	POLYETHYLENE PE		Kg/K
4	S-ATA 7P/F 无弹 INSULATOR BLACK, PIN GOLD FLASH, IMPACT TYPE	1	SET
3	S-ATA 7+15P/F INSULATOR BLACK, PIN GOLD FLASH, IMPACT TYPE	1	SET
2	UL1007 20AWG L=250mm COLOR:RED、BLACK.	各1	PCS
1	UL 21149 (2C*26AWG+AL)*2C+3D 7PIN PH:1.27mm OD:2.2*7.8 红色外被	0.22	M
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MKSA-0207R2220-F25C-LF

SERIES

02 WAY

22 WAY

7 PIN 90°

LEADFREE

250mm FEMALE TO FEMALE

20 AWG

DESCRIPTION: SATA7+15P TO SATA7P 90度 无弹 L=220MM
+2510 PH2.54*2P CABLE L=250MM