


PIN OUT

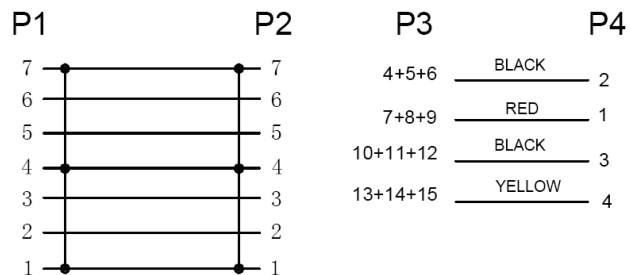

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: 5Ω /max.
3. Insulation Resistance: 10MΩ /min.
4. Hi-Pot: 300v dc/10ms.

6	HOUSING: MK-H-04 & 4PCS TERMINAL	1	SET
5	OUTER MOLDED: 45P PVC COLOR: BLACK		KG/K
4	SATA7+15P Female Pin Gold Flash	1	SET
3	SATA7P Female Pin Gold Flash	1	SET
2	UL1007 22AWG WIRE, COLOR: BLACK、 RED、 BLACK、 YELLOW	各1	PCS
1	SATA CABLE UL21149 (26/2P+A) *2+3D JACKET OD: 2.2 *7.6 RED	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MKSA-0407R222226-F21C-LF

SERIES

04 PIN
7 PIN 90°
210mm
LEADFREE
FEMALE TO FEMALE
22.26AWG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: