


630±20

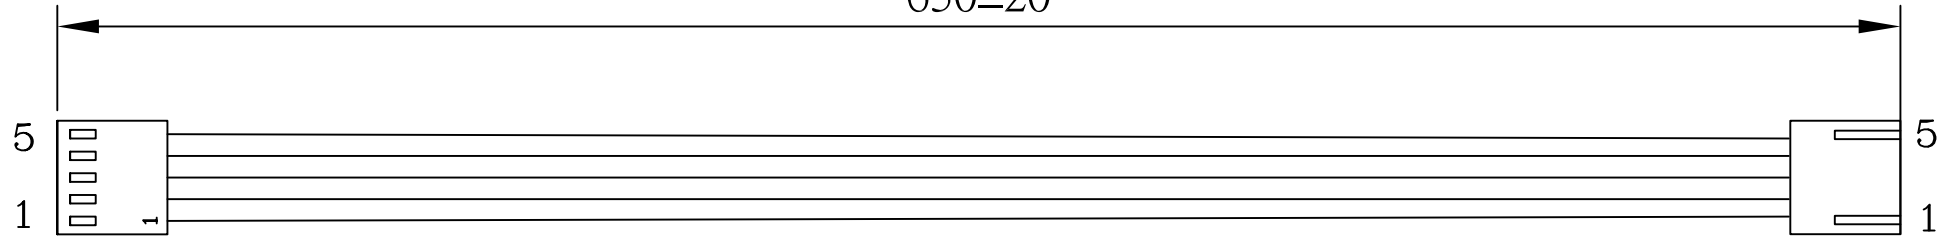

P1.
MK-H-05

P2.
MK-H-05

WIRING DIAGRAM

MKX2-0505-F63C-LF
LEADFREE

RoHS Compliant

| | P1 | | P2 | |
|------|----|-------|----|------|
| BLUE | 1 | ————— | 1 | BLUE |
| GRAY | 2 | ————— | 2 | GRAY |
| GRAY | 3 | ————— | 3 | GRAY |
| GRAY | 4 | ————— | 4 | GRAY |
| GRAY | 5 | ————— | 5 | GRAY |

| 3 | TERMINAL1 | 10 | PCS | MK-T-22 |
|-----|-----------|------|-------|--|
| 2 | HOUSING1 | 2 | PCS | MK-H-05 |
| 1 | CABLE | 1 | SET | UL1007 24AWG 630*4*4mm #BLUE UL1007 24AWG 630*4*4mm #GRAY UL1007 24AWG 630*4*4mm #GRAY UL1007 24AWG 630*4*4mm #GRAY UL1007 24AWG 630*4*4mm #GRAY |
| NO. | PART NO. | Q'TY | UNITS | DESCRIPTION |



PART NO. MKX2-0505-F63C

DWG NO. MKX2-0505-F63C

CHECKED BY CY

FILE NO.

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:


2.54 MK 5P/5P L:630mm

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE