


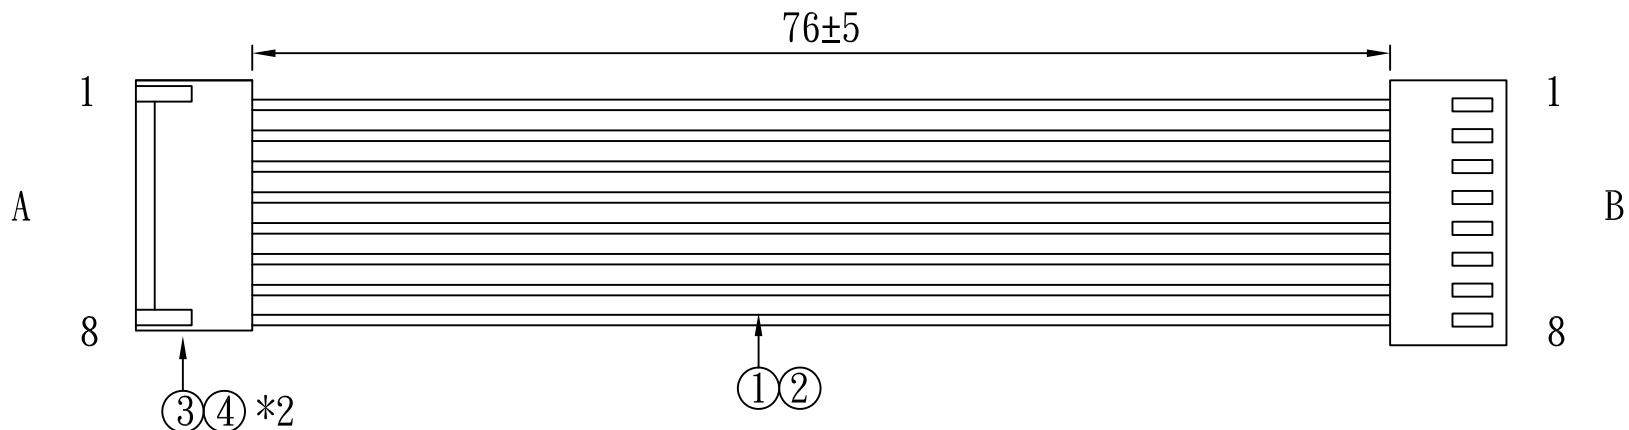

BOM表：

序號	材料規格	用量
1	WIRE:UL1007 #22 黑	4pcs
2	WIRE:UL1007 #22 紅	4pcs
3	HOUSING:MK-H-08	2pcs
4	TERMINAL:MK-TC-22	16pcs

A	線色	B
1	黑	1
2	紅	2
3	黑	3
4	紅	4
5	黑	5
6	紅	6
7	黑	7
8	紅	8

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MKX2-080822-F3N-LF

SERIES

LEADFREE


76mm

FEMALE TO FEMALE

22 AWG

08 TO 08 WAY

DESCRIPTION:

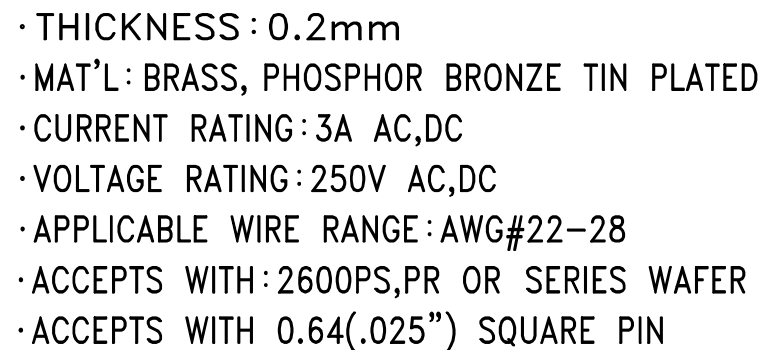

SEC' A-A

照片框

MK-TC-22-LF
 SERIES LEADFREE
 22~28 AWG
 CAT EAR
 TERMINAL

DESCRIPTION:

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

 $.XX \pm 0.20$


SCALE 1 : 1

P PROJECTION 



PPOJECTION 

煜倫股份有限公司

www.morethanall.com

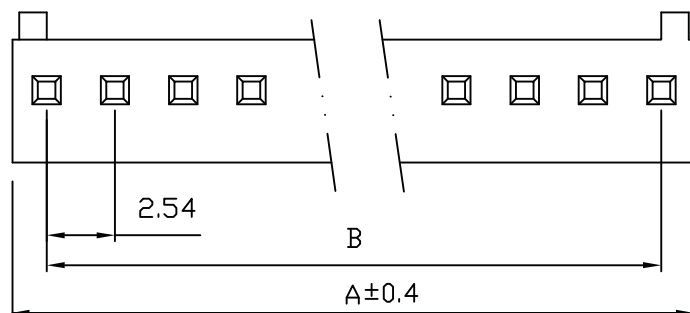

- * MAT'L: NYLON 66 UL94V-0(white)
- * NYLON 66 UL94V-2(beige)
- * CURRENT RATING: 3A AC,DC
- * VOLTAGE RATING: 250V AC,DC
- * ACCEPTS WITH: 2600PS,PR OR SERIES WAFER

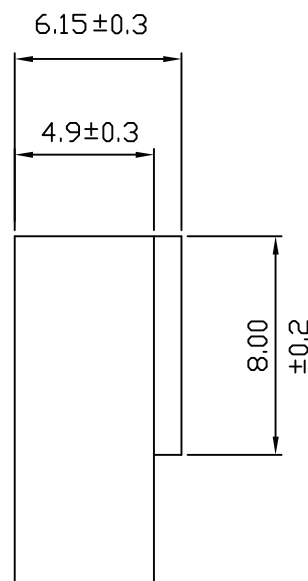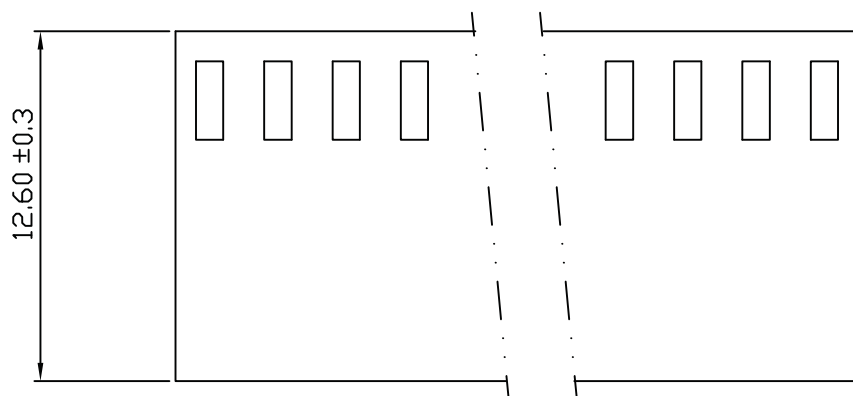

NO.	A	B
02	5.68	2.54
03	8.22	5.08
04	10.76	7.62
05	13.30	10.16
06	15.84	12.70
07	18.38	15.24
08	20.92	17.78
09	23.46	20.32
10	26.00	22.86
11	28.54	25.40
12	31.08	27.94
13	33.62	30.48
14	36.16	33.02
15	38.70	35.56
16	41.24	38.10
17	43.78	40.64
18	46.32	43.18
19	48.86	45.72
20	51.40	48.28

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MK-H-xx-LF
SERIES | LEADFREE
02~20WAY
HOUSING

DESCRIPTION: