
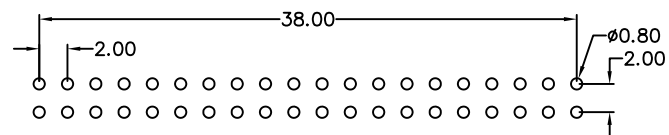



MATERIAL

Insulator: Nylon 6T
Contact Pin : Brass

SPECIFICATION

CURRENT RATING : 1 AMPS
WITHSTANDING VOLTAGE : 500V AC(1min)
INSULATION RESISTANCE : 1000M OHMS MIN.
CONTACT RESISTANCE: 20M OHMS MAX
OPERATING TEMPERATURE : -40°C TO +85°C

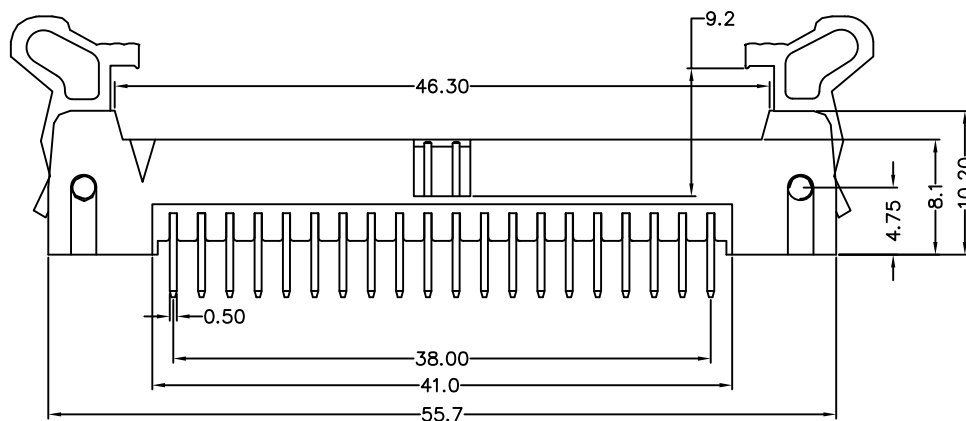

Recommended P.C.B Layout



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ML-D-040-LF
SERIES | LEADFREE
40 WAY
DIP 180°

DESCRIPTION: EJECTOR HEADER 2.0mm DUAL ROW, STRAIGHT TYPE