


5.9±0.15

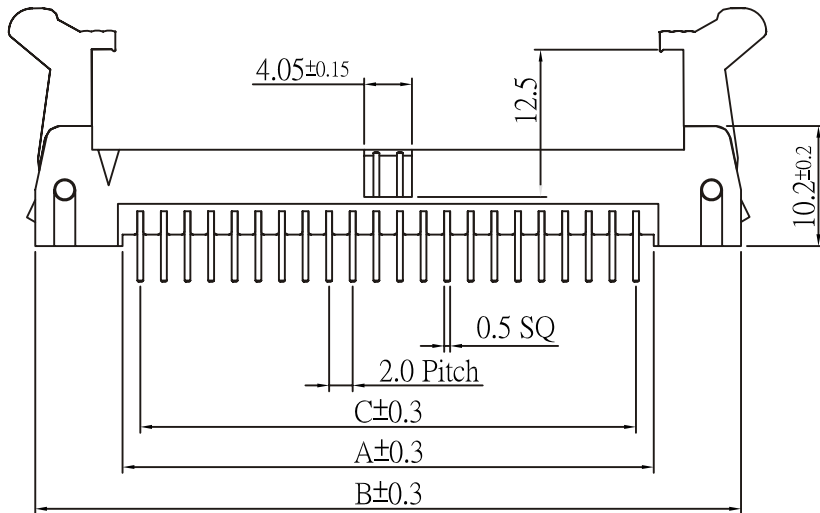

4.05±0.15

12.5

10.2±0.2



0.5 SQ

2.0 Pitch

C±0.3

A±0.3

B±0.3

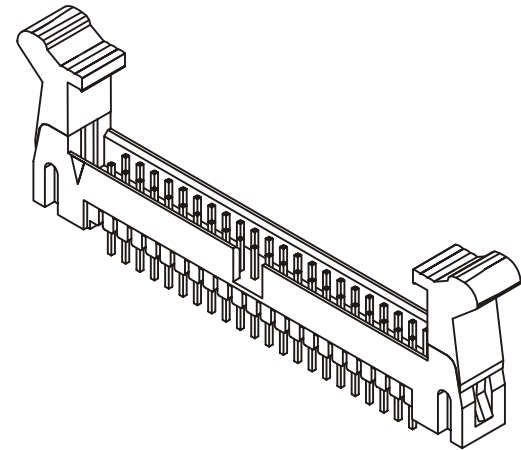

3.0±0.2

2.0 Pitch


Circuits	Dimension		
	A	B	C
10	10.0	25.9	8.0
12	12.0	27.9	10.0
14	14.0	29.9	12.0
16	16.0	31.9	14.0
20	20.0	35.9	18.0
22	22.0	37.9	20.0
24	24.0	39.9	22.0
26	26.0	41.9	24.0
30	30.0	45.9	28.0
32	32.0	47.9	30.0
34	34.0	49.9	32.0
40	40.0	55.9	38.0
44	44.0	59.9	42.0
50	50.0	65.9	48.0

Conteract:

Contact:Brass.

Insuiator:Nylon 9T.

Finish:Gold flash plated over nickel.

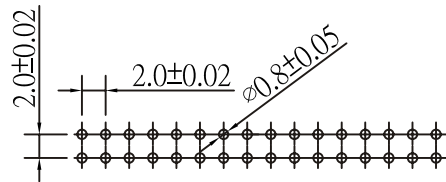

P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

ML-DL-xxx-LF  
SERIES | LEADFREE  
010-050 WAY  
LONG LEVER  
DIP 180°

煜倫股份有限公司

www.morethanall.com

PPOJECTION

DESCRIPTION: Shrouded Header2.0 Pitch Dual Row Straight (Long Lever)