


Features:

- Finished: Tin-plated
- Thickness: 0.2mm

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 90°C

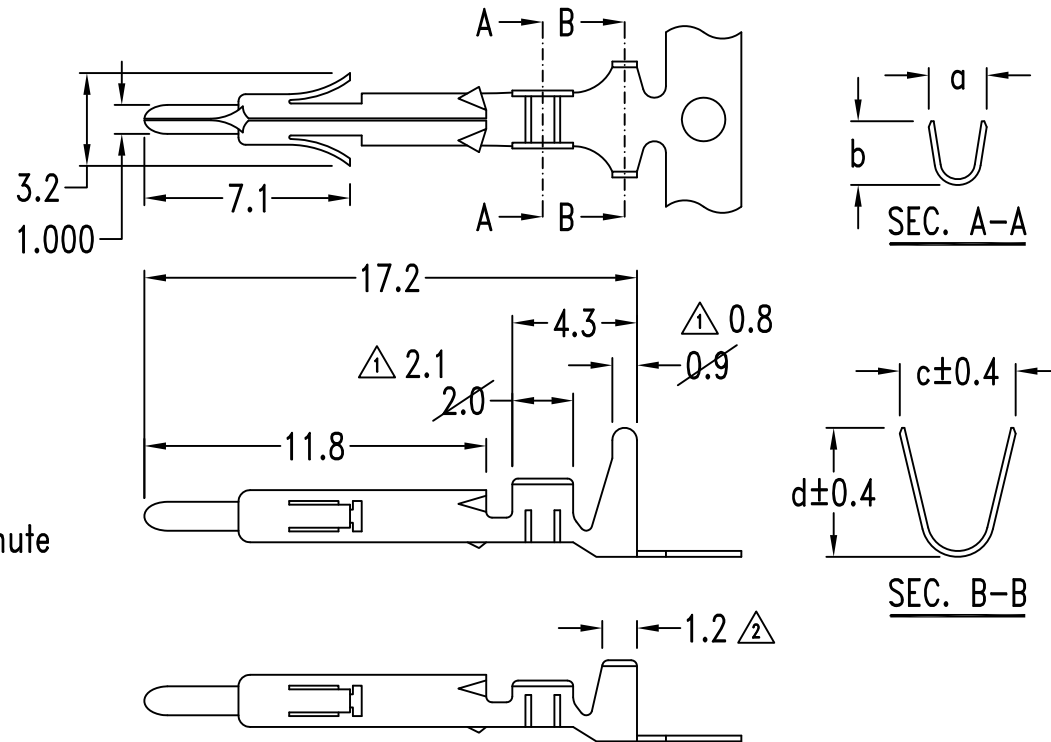

Δ Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire range	Material
	a	b	c	d		
ML-M-22	1.9	1.6	3.2	2.8	#22 ~ #26	Brass
ML-M-18	2.0	2.2	4.0	4.4	#18 ~ #24	Brass

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, \pm
.X \pm 0.25
.XX \pm 0.15
.XXX \pm 0.05
ANG \pm

照片框

ORDER INFORMATION

ML-M-xx-LF
SERIES | T LEADFREE
22:22~26 AWG
18:18~24 AWG
MALE TERMINAL

DESCRIPTION: .039"(1.0mm) Male Crimp Terminal