
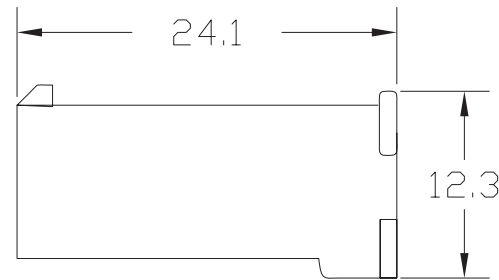



Pcs/1bag  
1000

ML-P-1X01




Pcs/1bag  
1000

ML-P-1X02




SPECIFICATIONS

Voltage rating:300V AC,DC  
Current rating:5A AC,DC  
Withstanding voltage:1500V AC/minute  
Insulation resistance:1000MΩHM min  
Temperature range:-25°C~+90°C  
Material:UL94V-2 Nylon 66

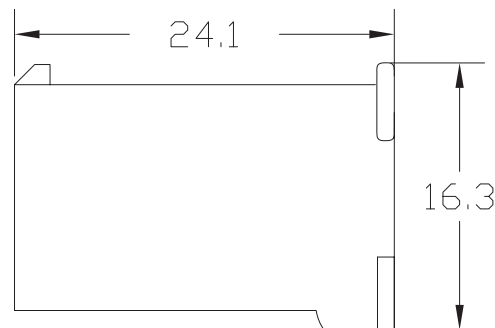

Pcs/1bag  
1000

ML-P-1X03



**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE


SIZE A4

PJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

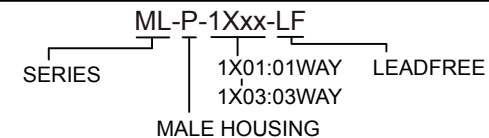

DESCRIPTION: